

# Relle Floor

[www.relleflooring.com](http://www.relleflooring.com)


## Homogeneous System

Dimension:

2/2.5/3.0mm(T)\*2m(W)

\*20/15m(L/Roll)

Directional & Non directional rolls

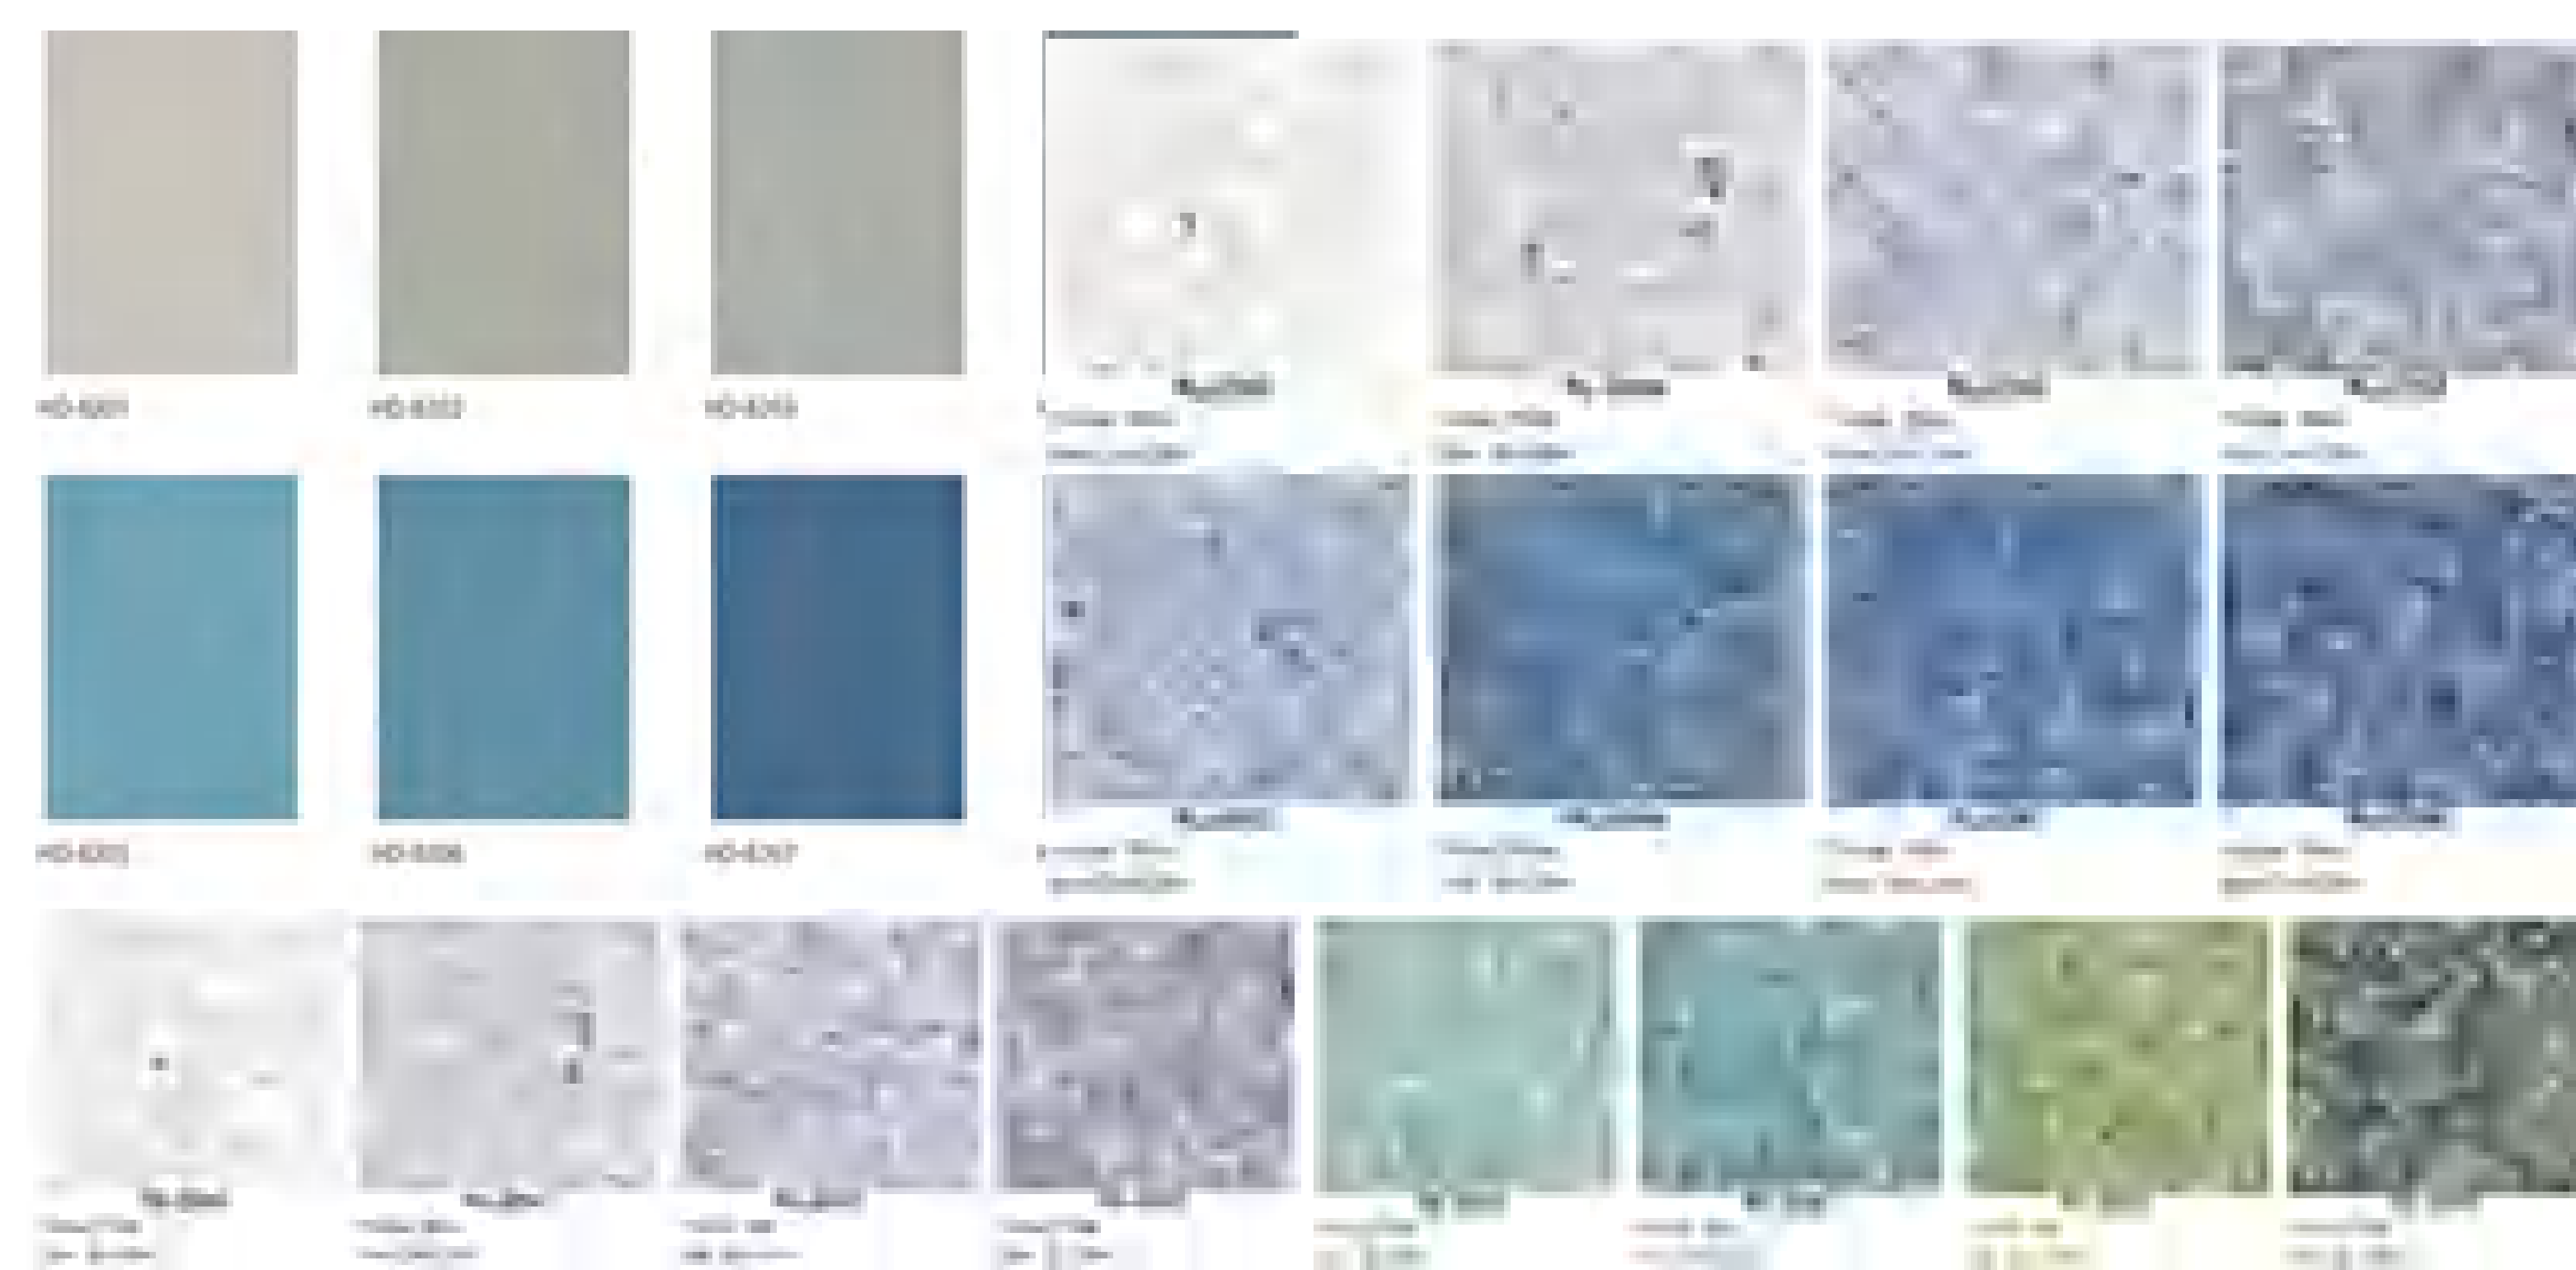


## Heterogeneous System

Dimension:


2/2.5/3.0mm(T)\*2m(W)

\*20/15m(L)/Roll

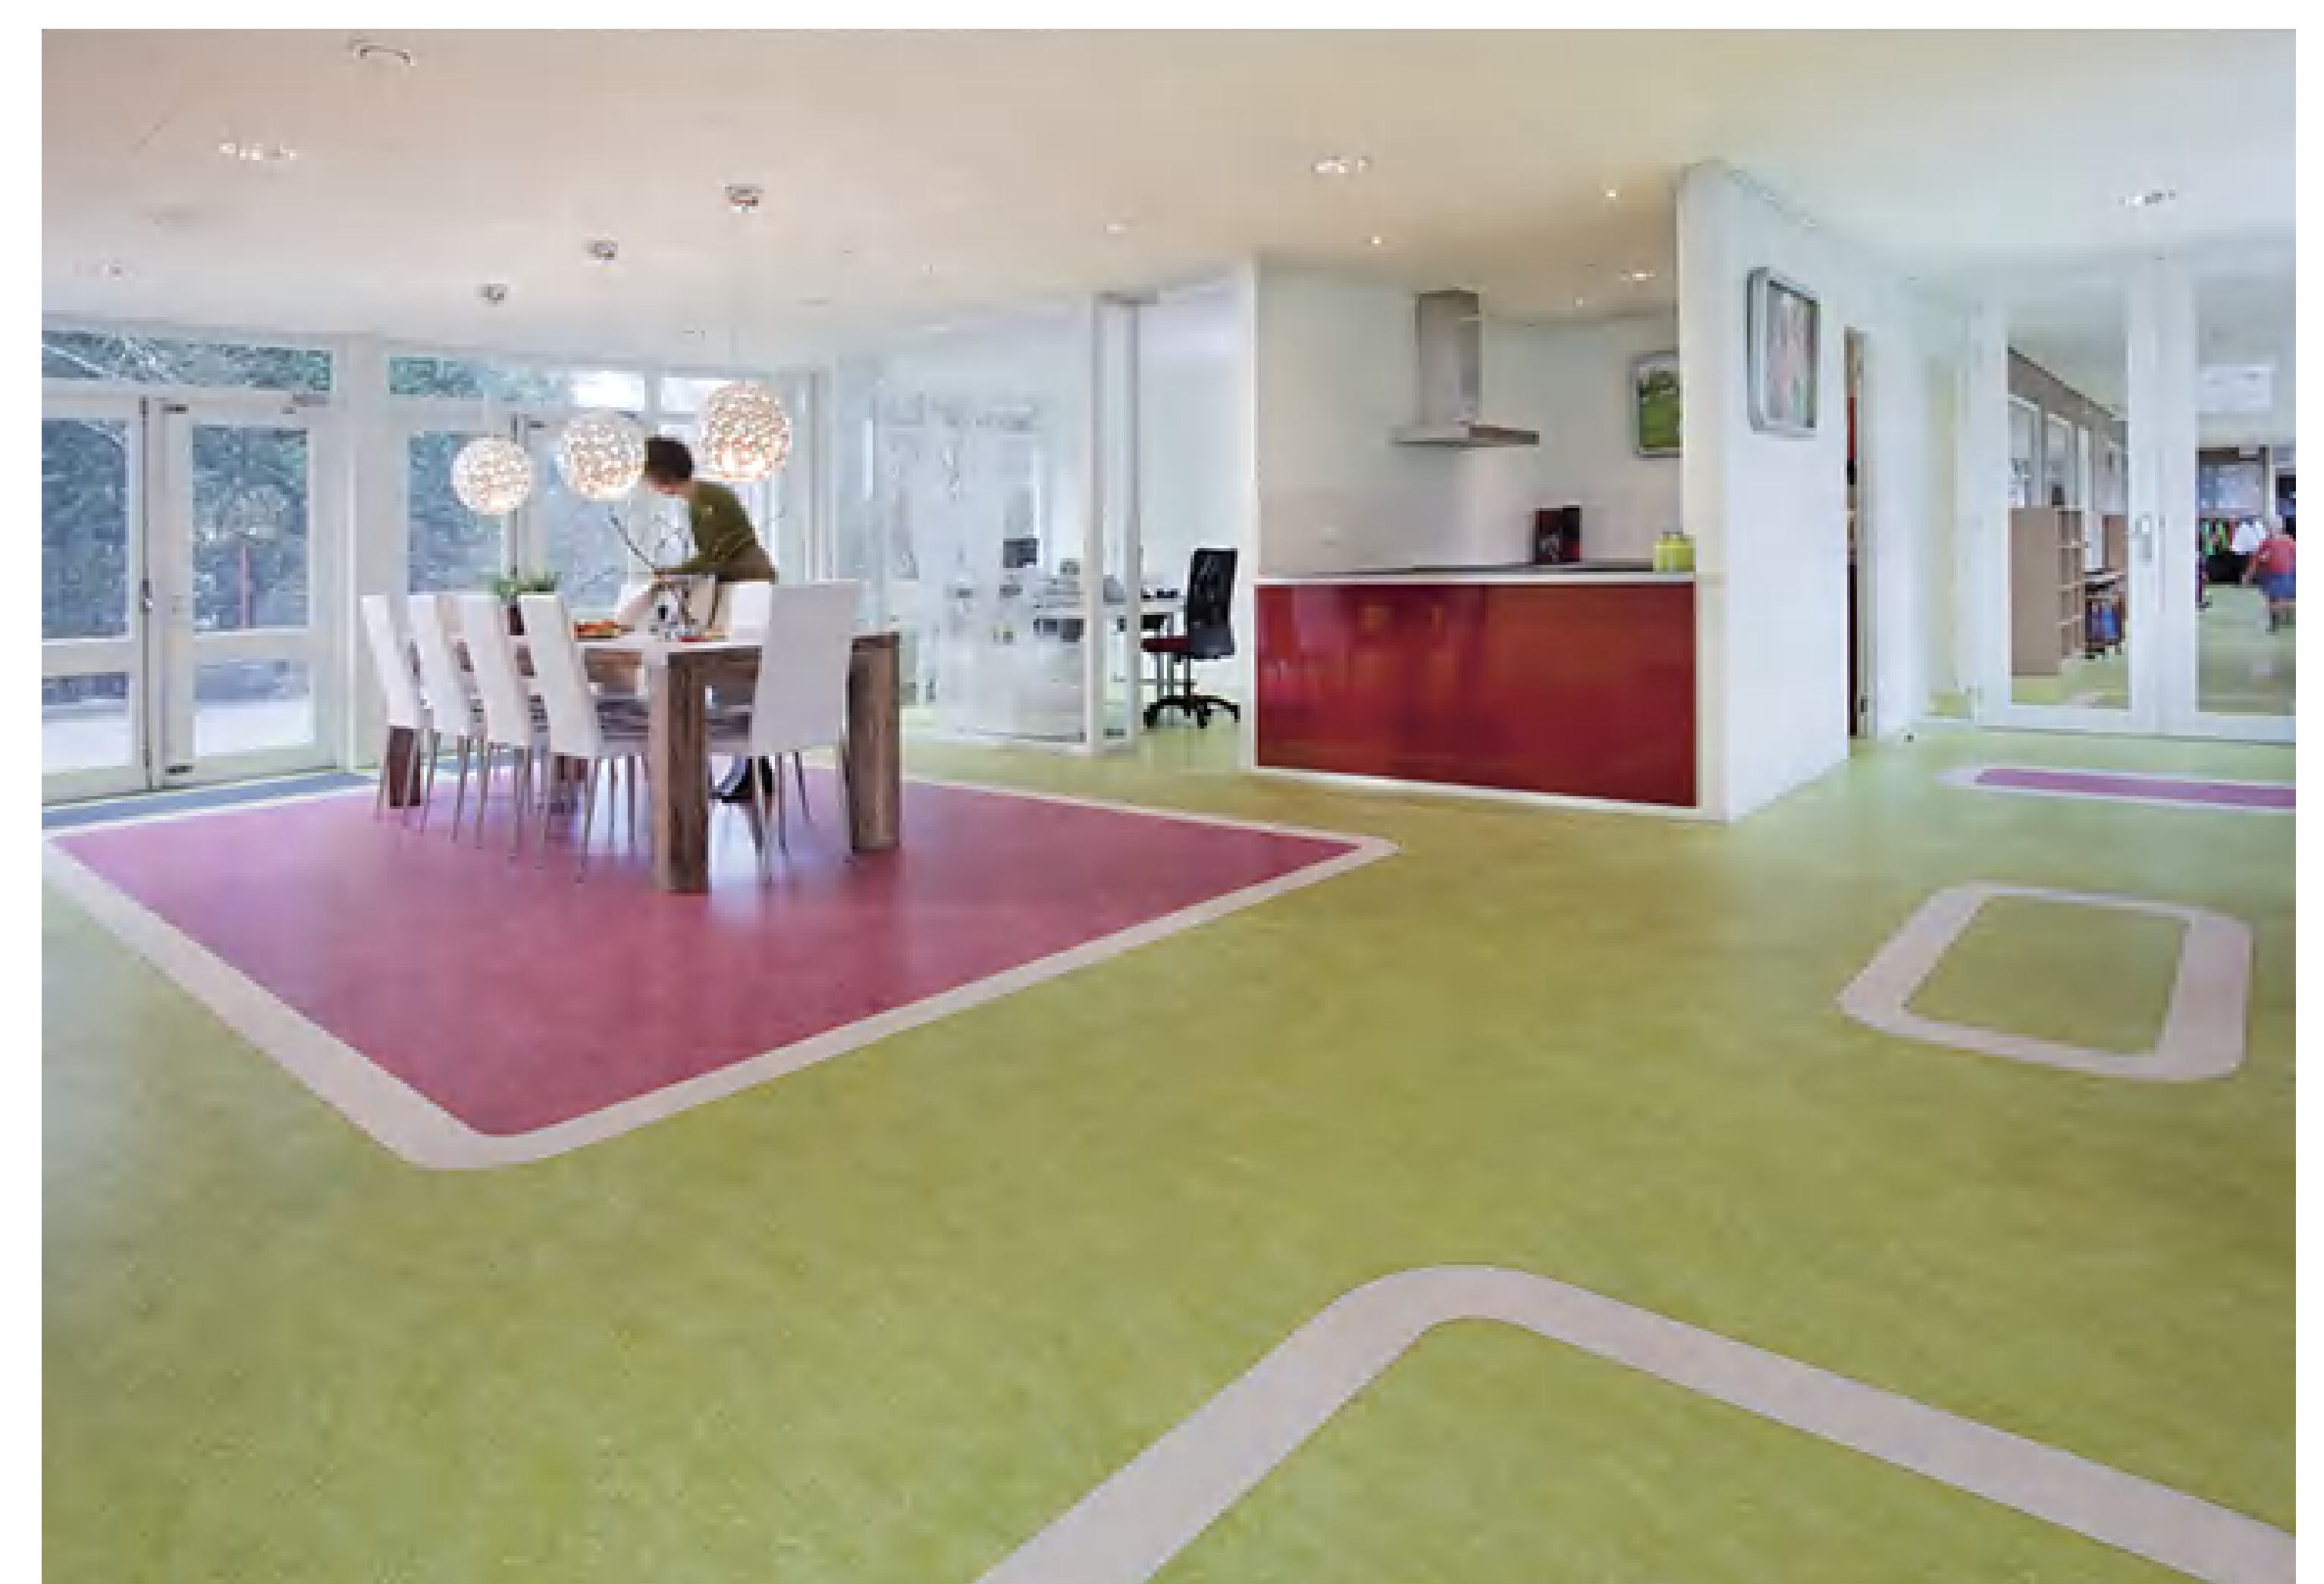

## Industry Flooring

Dimension: 1.4 / 1.8 mm(T)\*2.5m(W)\* 20m(L)/Roll

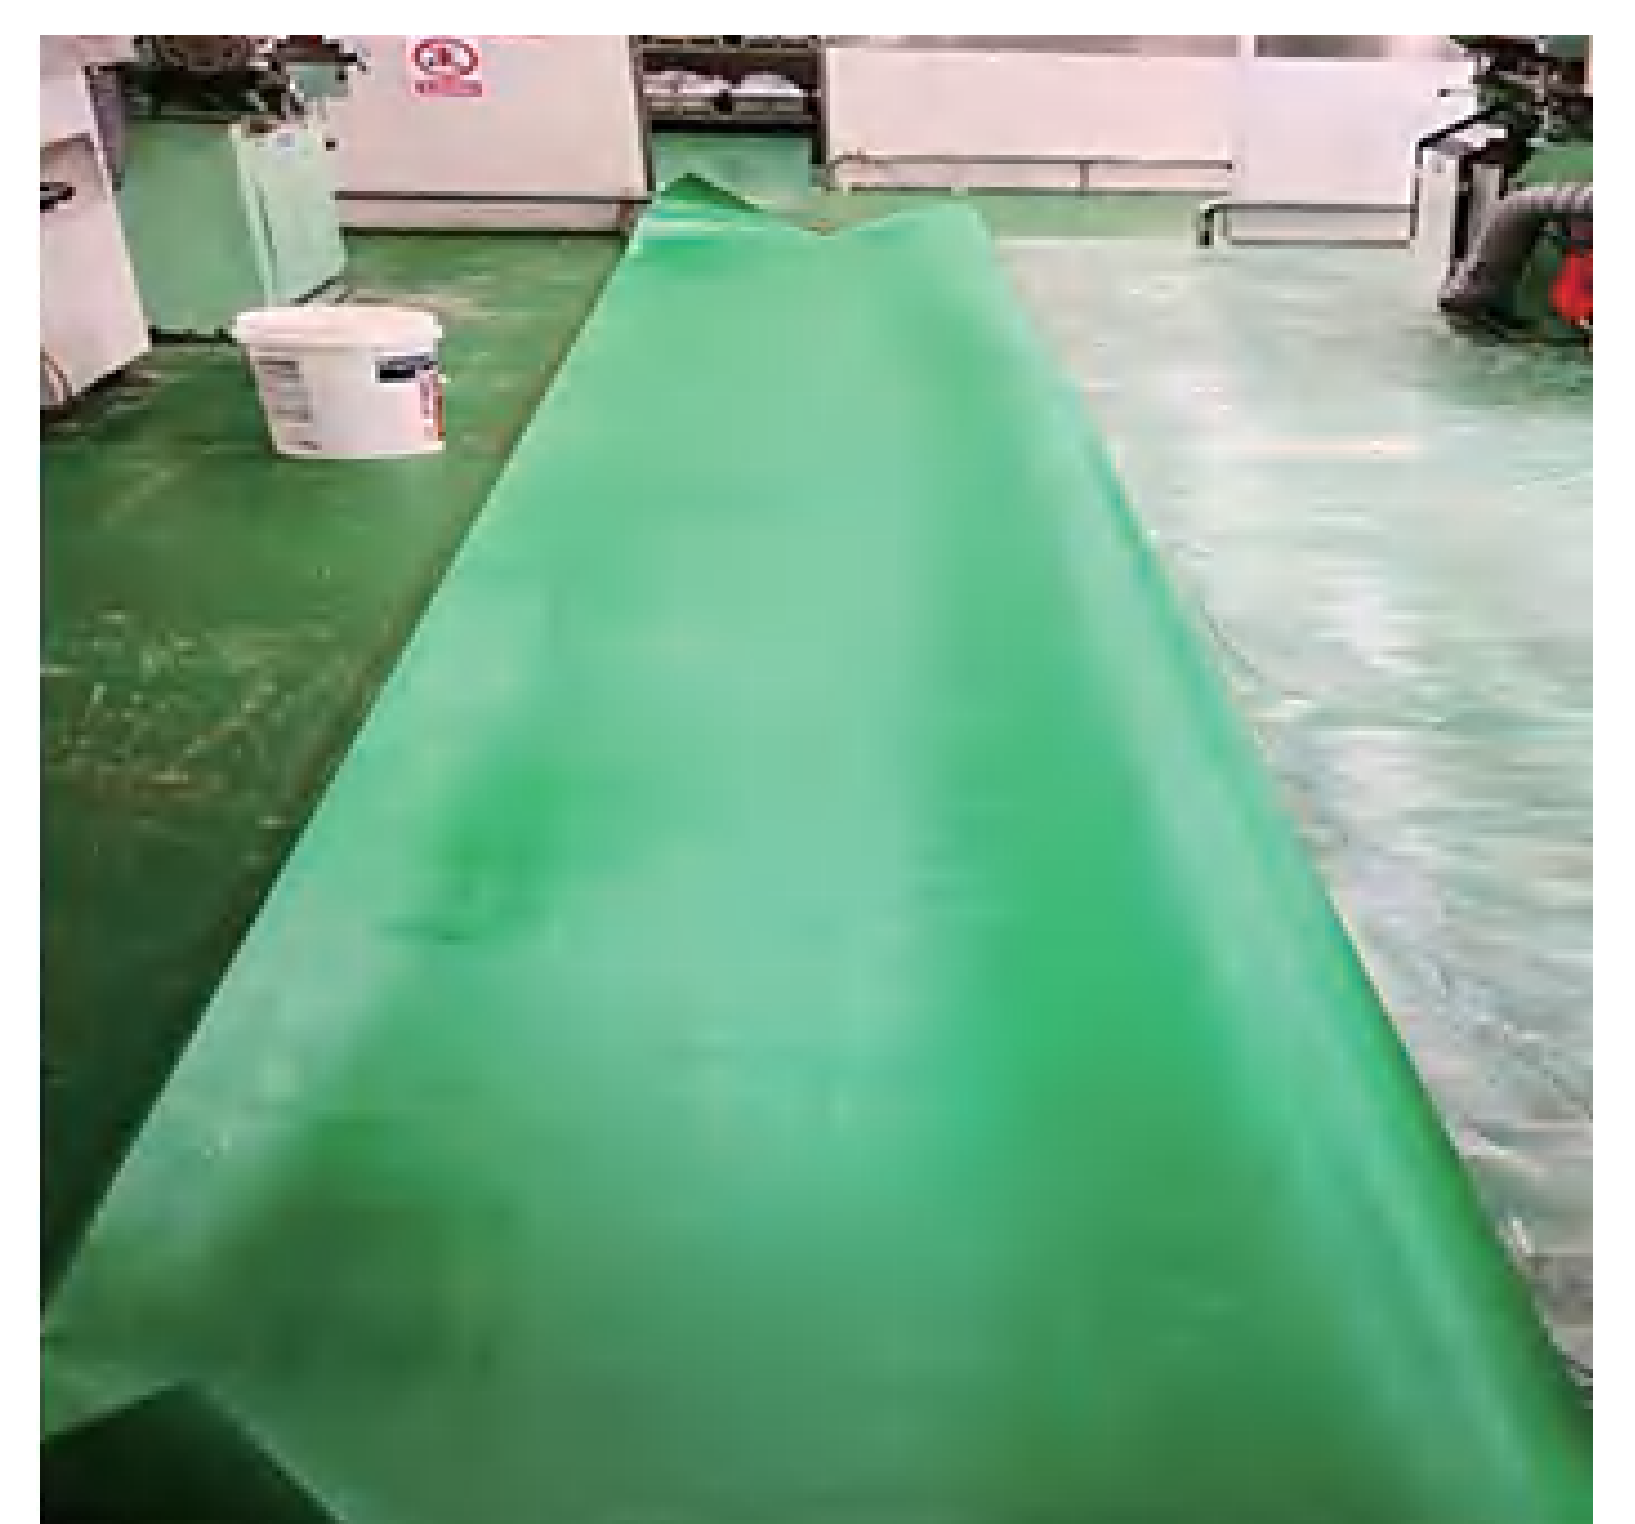



# Relle Floor


www.relleflooring.com

## Carpet Roll

Dimension: 4m(W)\*25m(L)/roll




Pile Style: Cut Loop pile  
Pile Material: 100% Nylon ,100%Polyester,  
80%Woo20%Nylon  
Pattern, Color: Customized  
Width: 4m & 3.66m /length: Customized  
Regular pile weight (nylon):  
1000g, 1200g, 14002, 16002, Customired

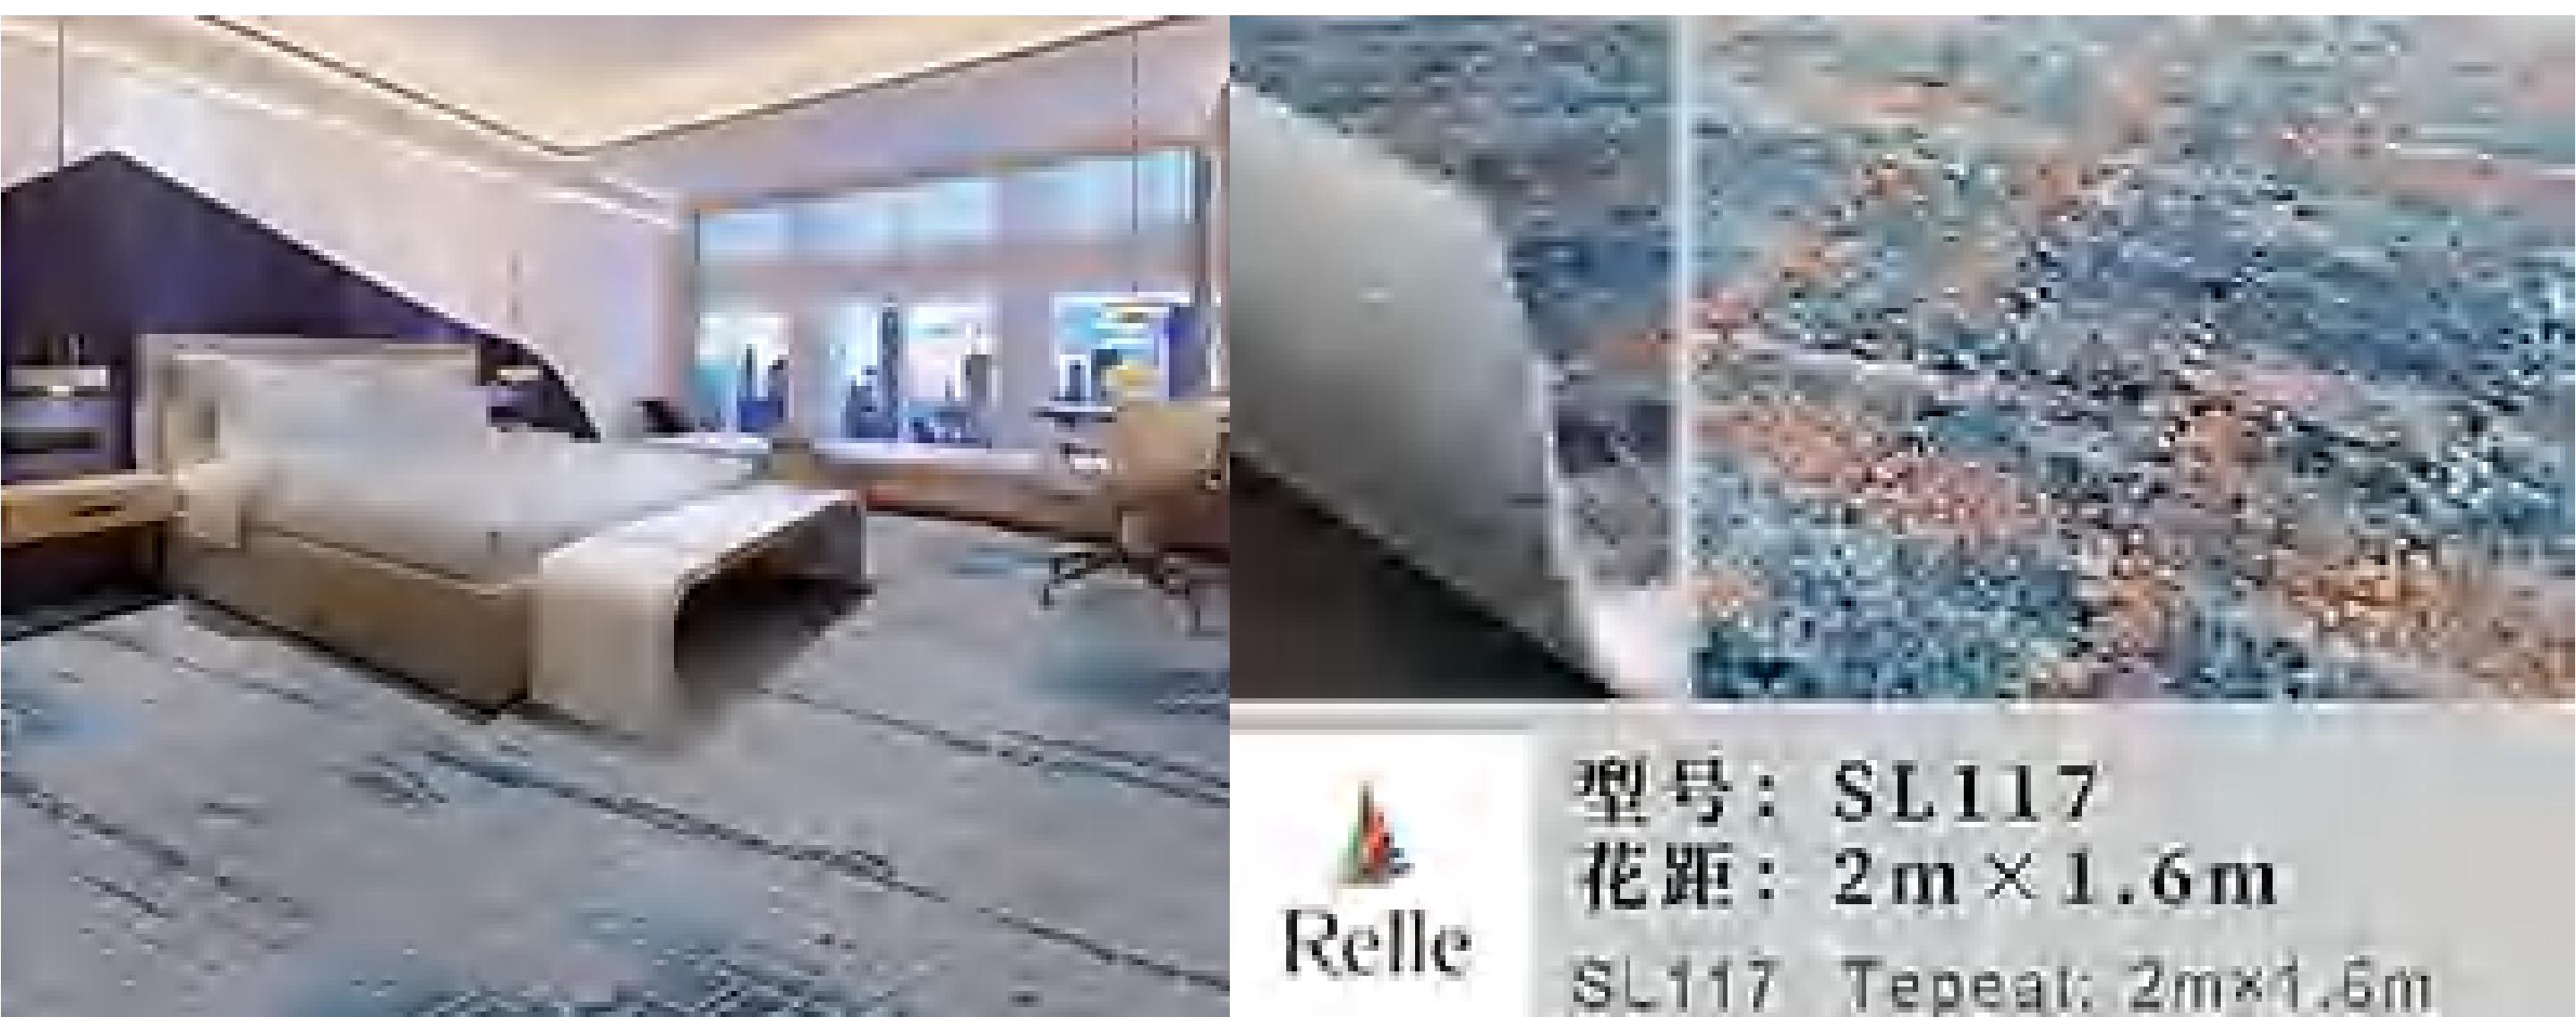

## Carpet Tile


Dimension: 50cm\*50cm/tile  
33.33cm\*100cm/tile

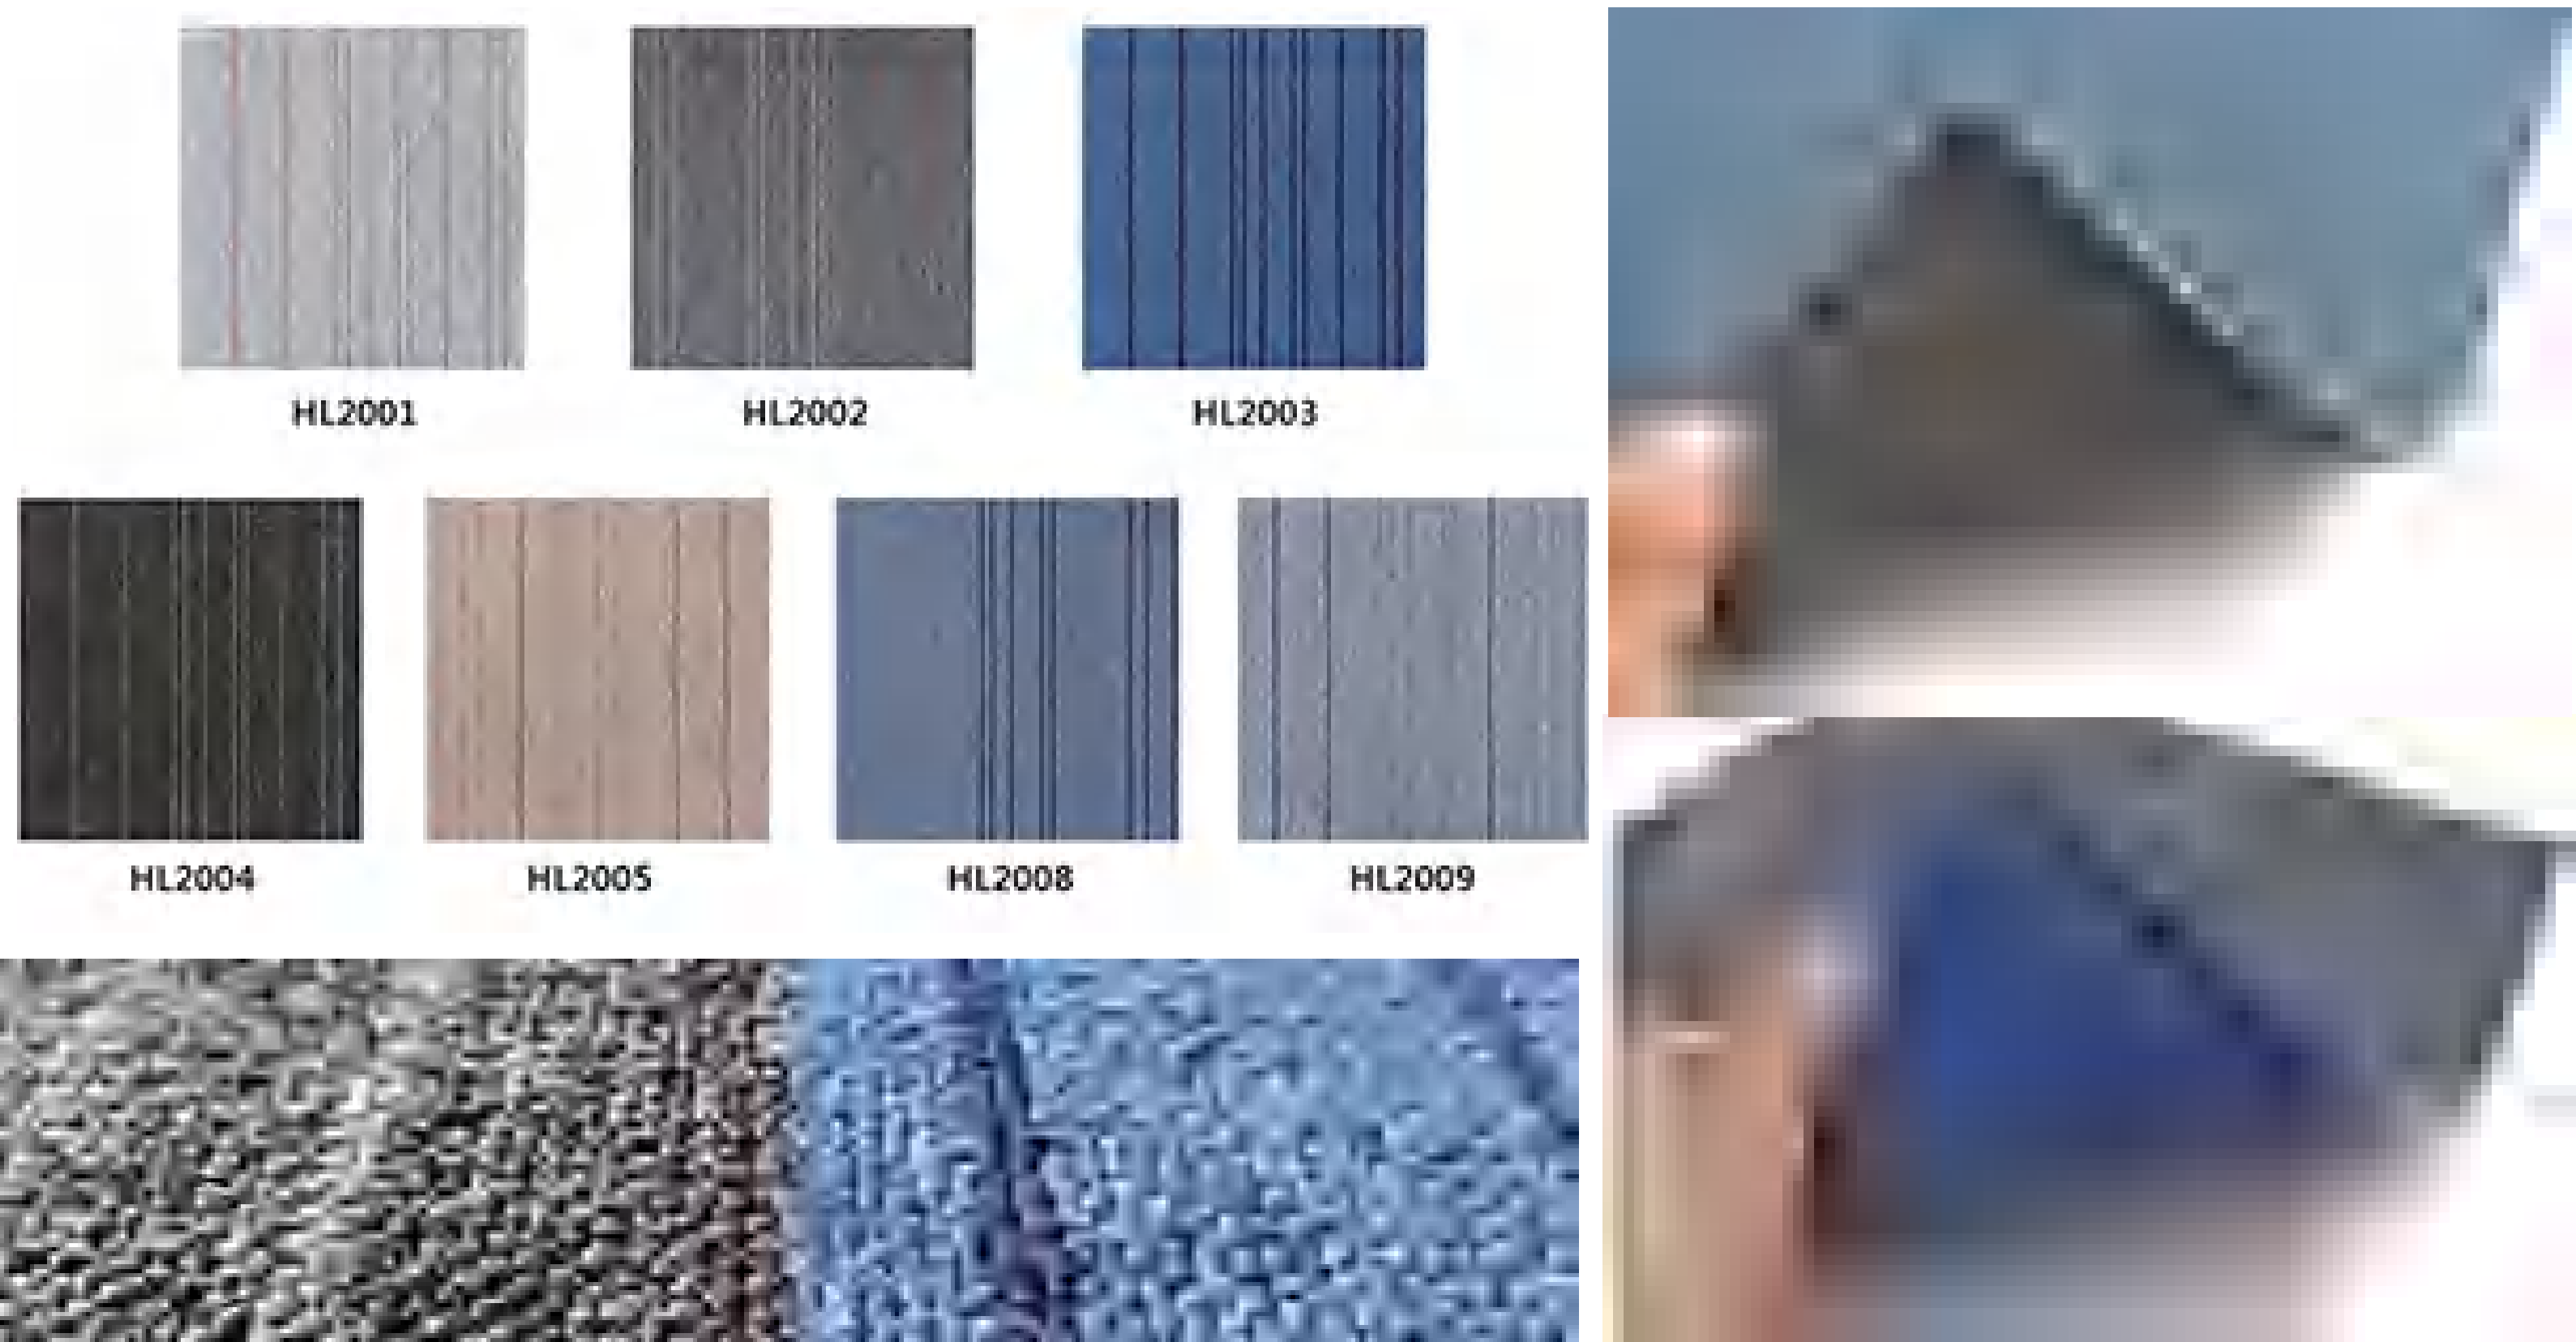

### PRODUCT DESCRIPTION

Construction: Machine Tufted  
Pile Style: Jacquard-Loop Pile  
Gauge: 1/10 ”  
Pile Material: 100%PP

Pile Height: 3mm+0.5mm  
Size: 50cmx50cm  
Backing: Non-woven

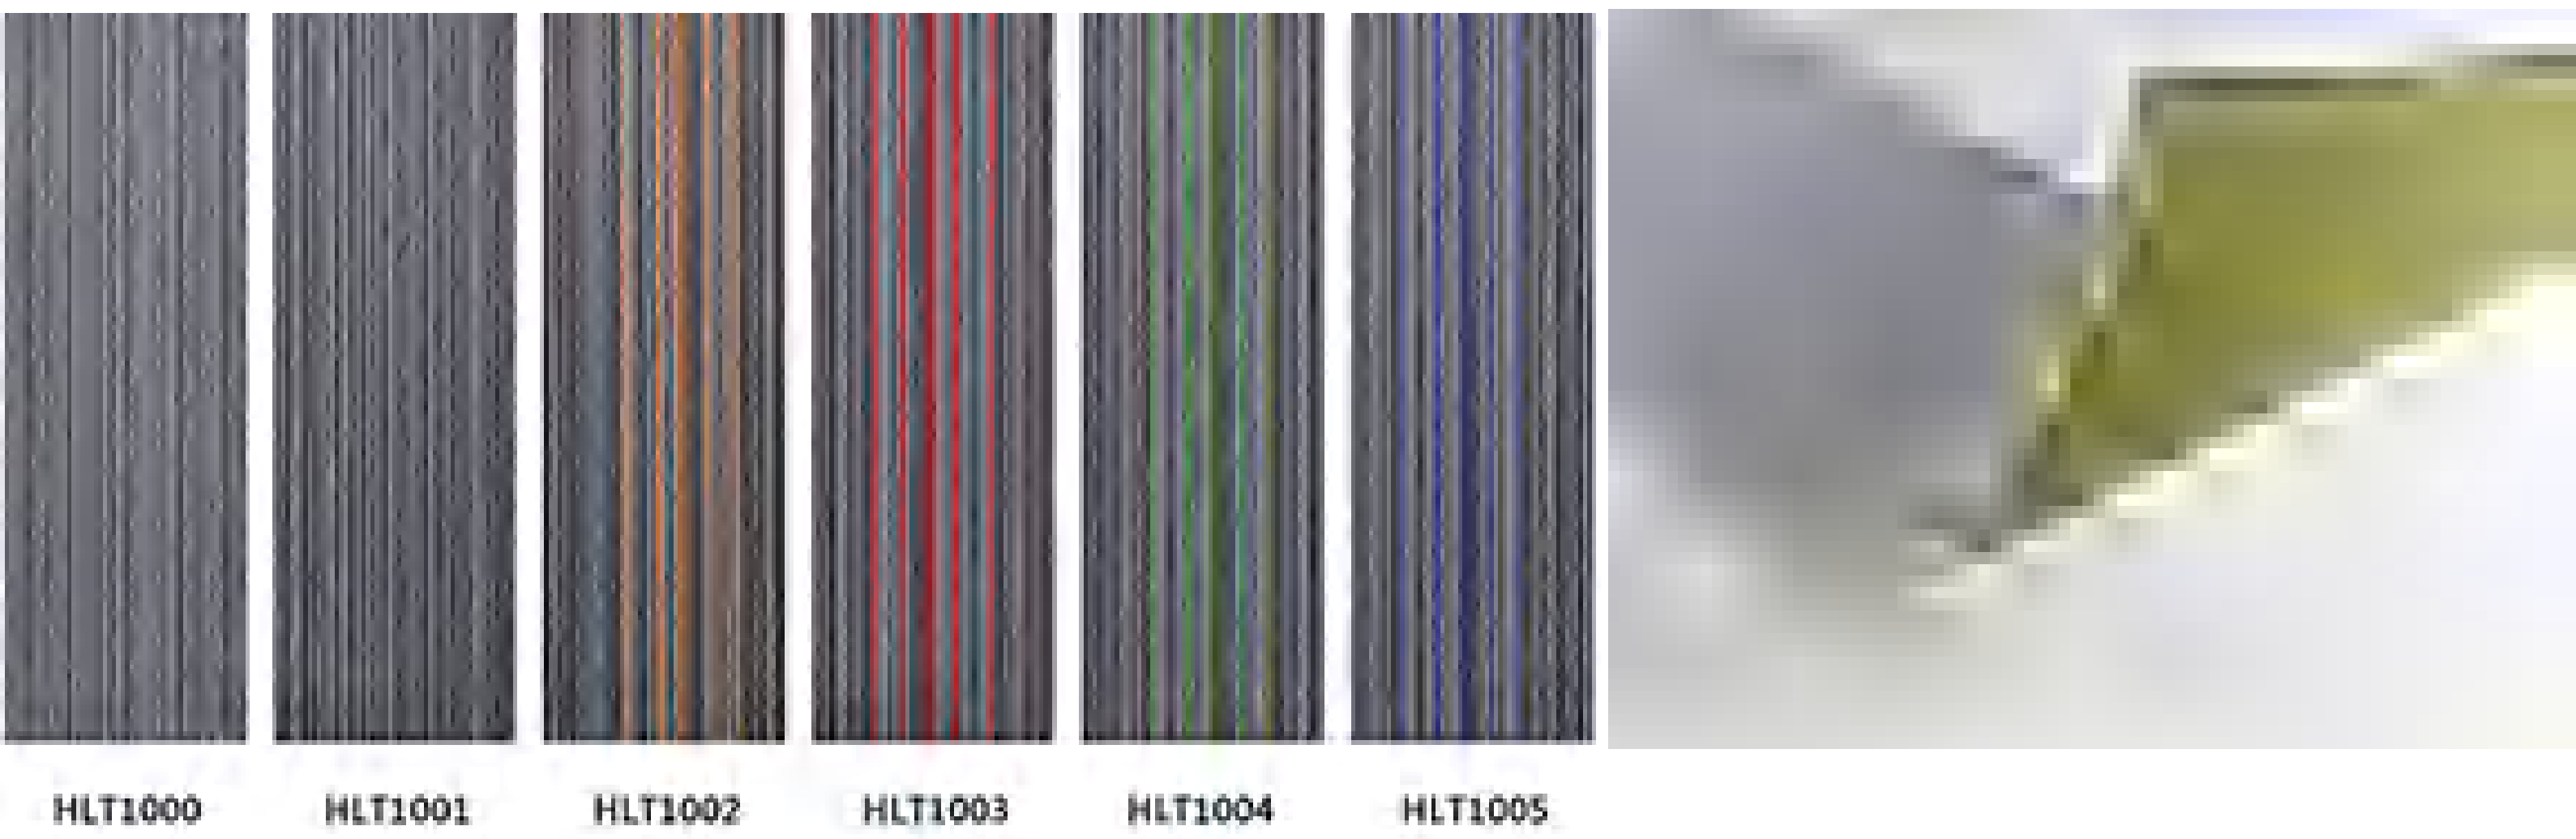

### PRODUCT DESCRIPTION

Construction: Machine Tufted  
Ple Style: Jacquard-Loop Pile  
Gauge: 1/10"

Ple Height; 3mmt0.5mm  
Size: 33.33cmx100cm  
Backing: Non-woven

Ple Material; 100%PP





# Relle Floor

[www.relleflooring.com](http://www.relleflooring.com)

## Linoleum Flooring

Dimension:

2/2.5/3.0mm(T)\*2m(W)\*32m(L)/Roll



## ESD Flooring Roll/Tile

Thickness:2.0mm

Static dissipative  $1.0 \times 10^6 \sim 1.0 \times 10^9 \Omega$


Conductive:  $1.0 \times 10^4 \sim 1.0 \times 10^6 \Omega$



## PVC Sports Floor

Dimension:

4/5/6/7/8mm (T)x 1.8m(W)×15m (L)

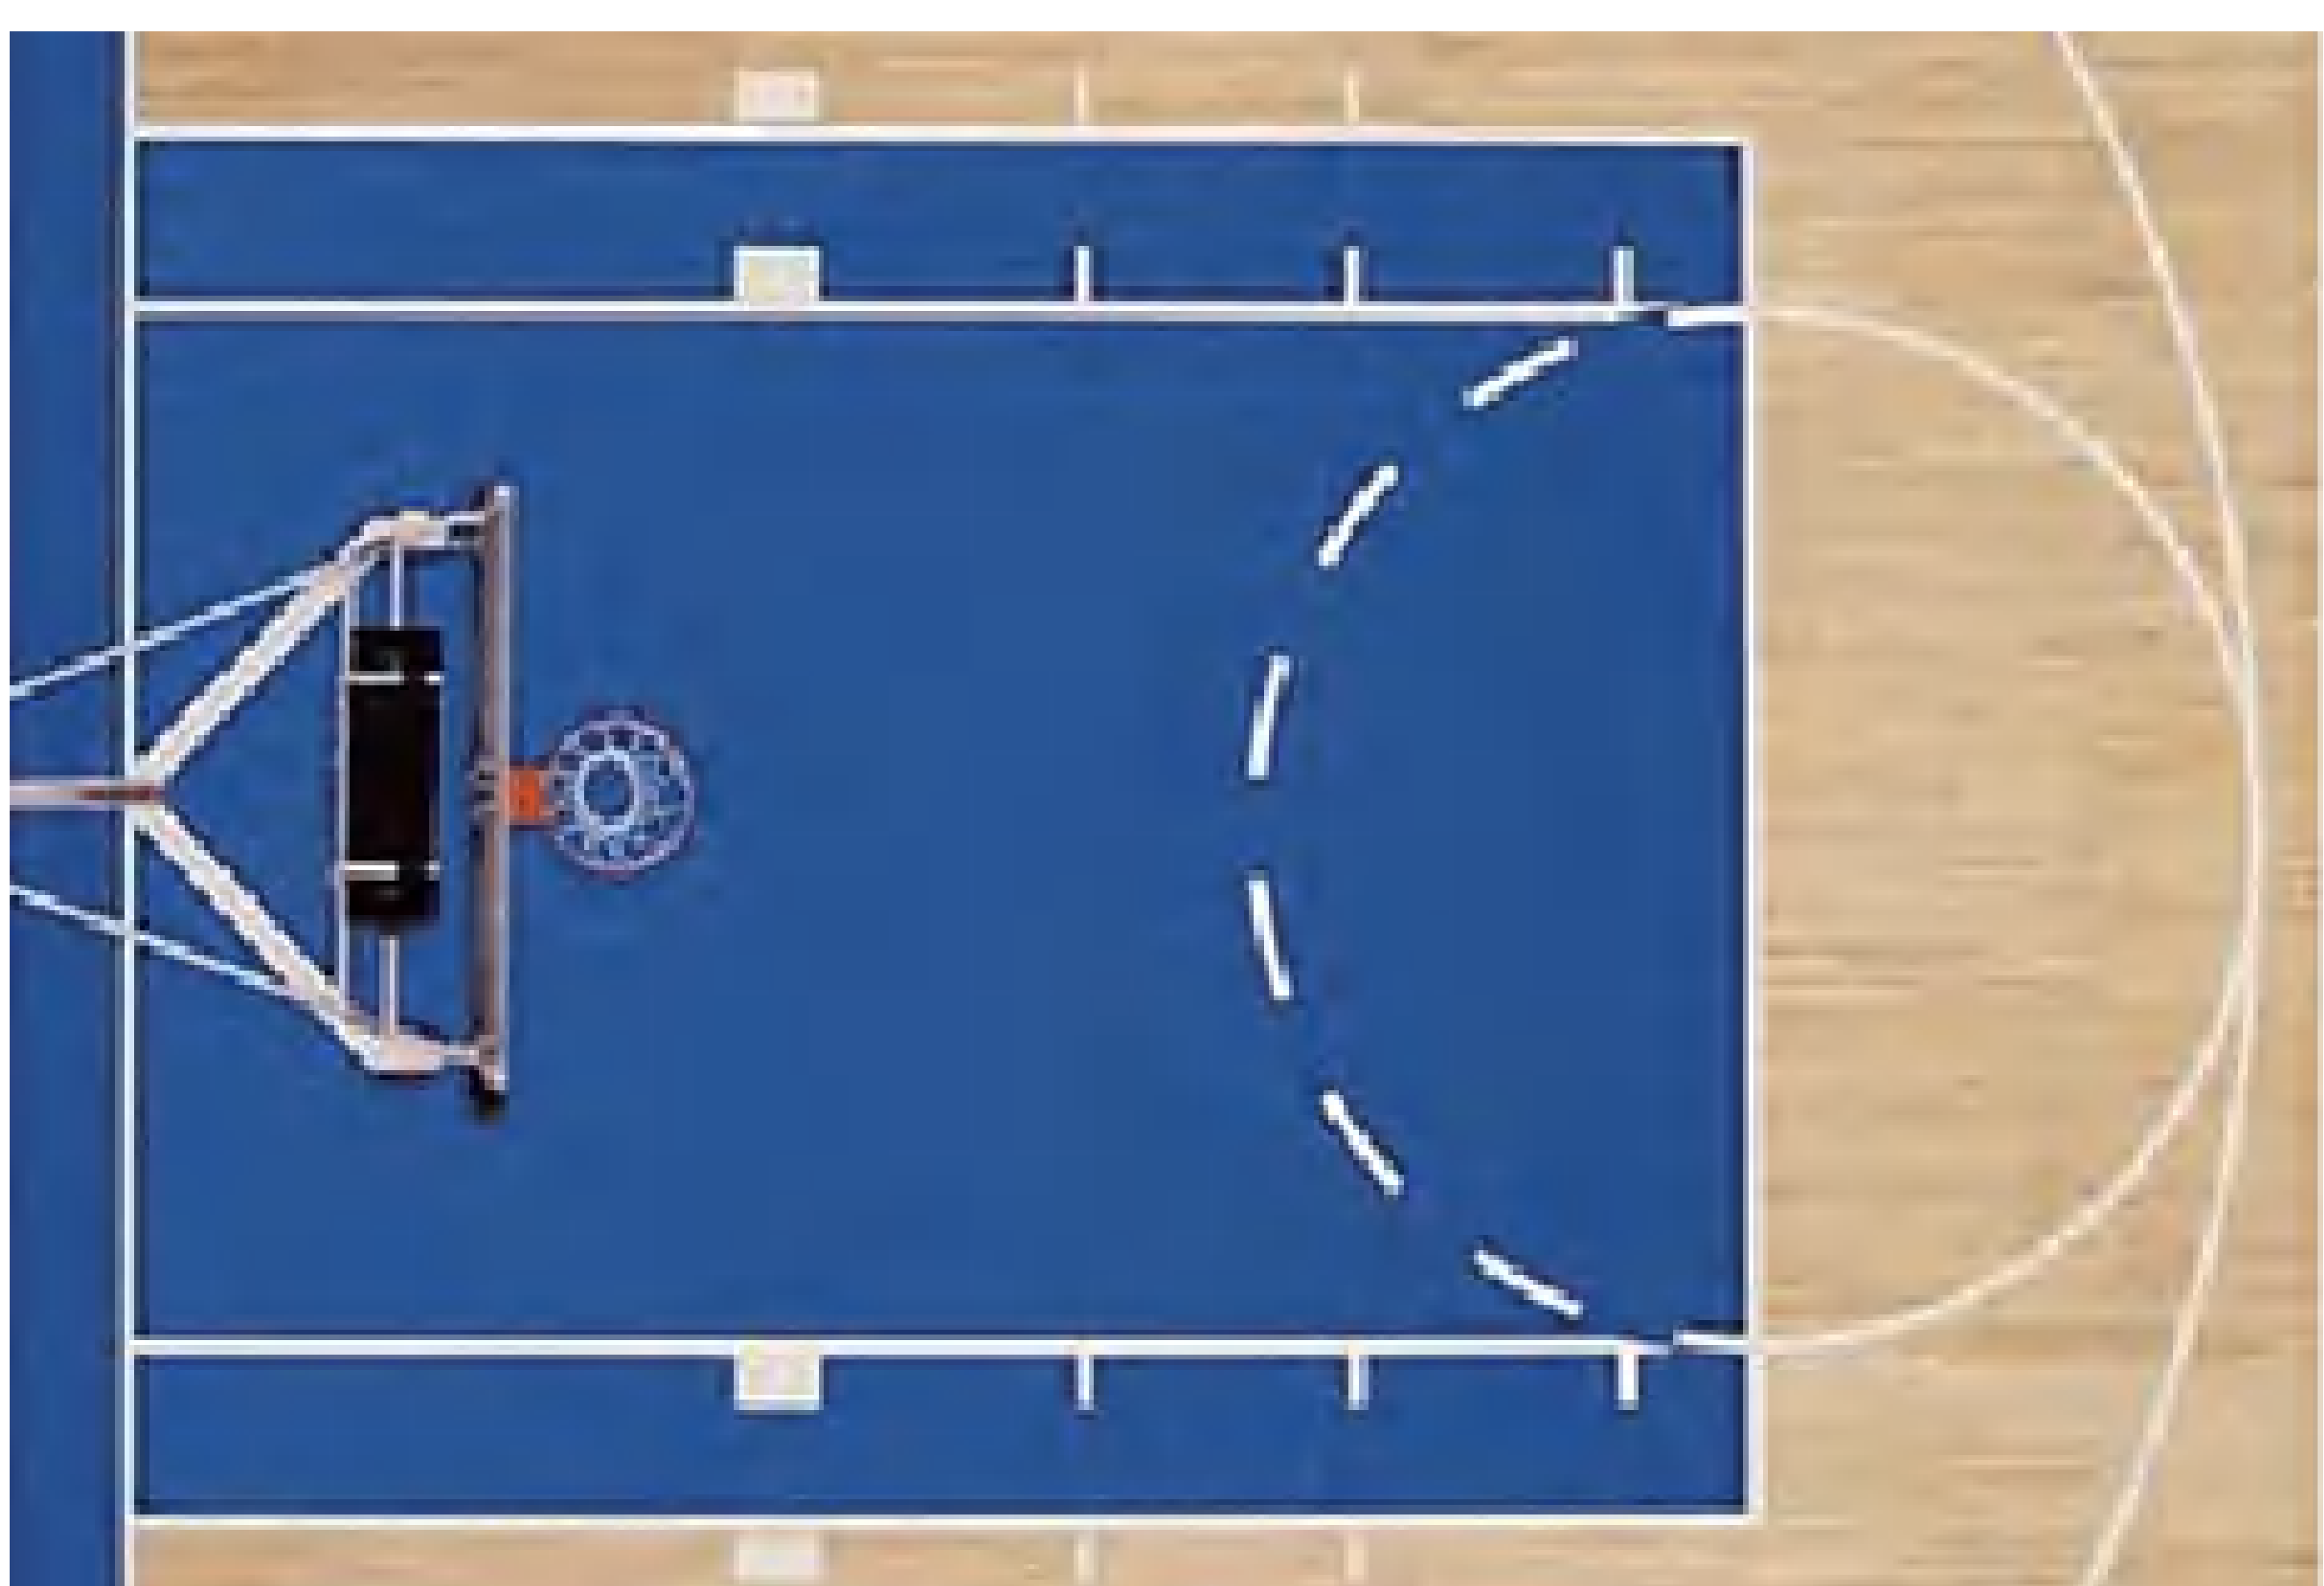



# Relle Floor

[www.relleflooring.com](http://www.relleflooring.com)

## SPC Click Tile

Dimension: 6 " \*36 " /7 " \*48 " /8 " \*36 "

Thickness: 4.0 / 5.0 / 6.0 / 8.0 mm



Format : Tiles  
Size : 182mm x 1220mm




Format : Tiles  
Size : 182mm x 1220mm



Format : Tiles  
Size : 182mm x 1220mm




Format : Tiles  
Size : 182mm x 1220mm

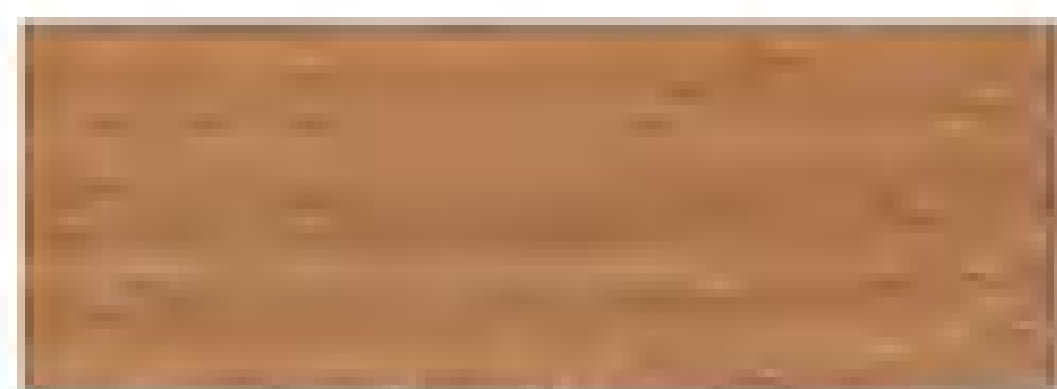

Format : Tiles  
Size : 182mm x 1220mm



Format : Tiles  
Size : 182mm x 1220mm

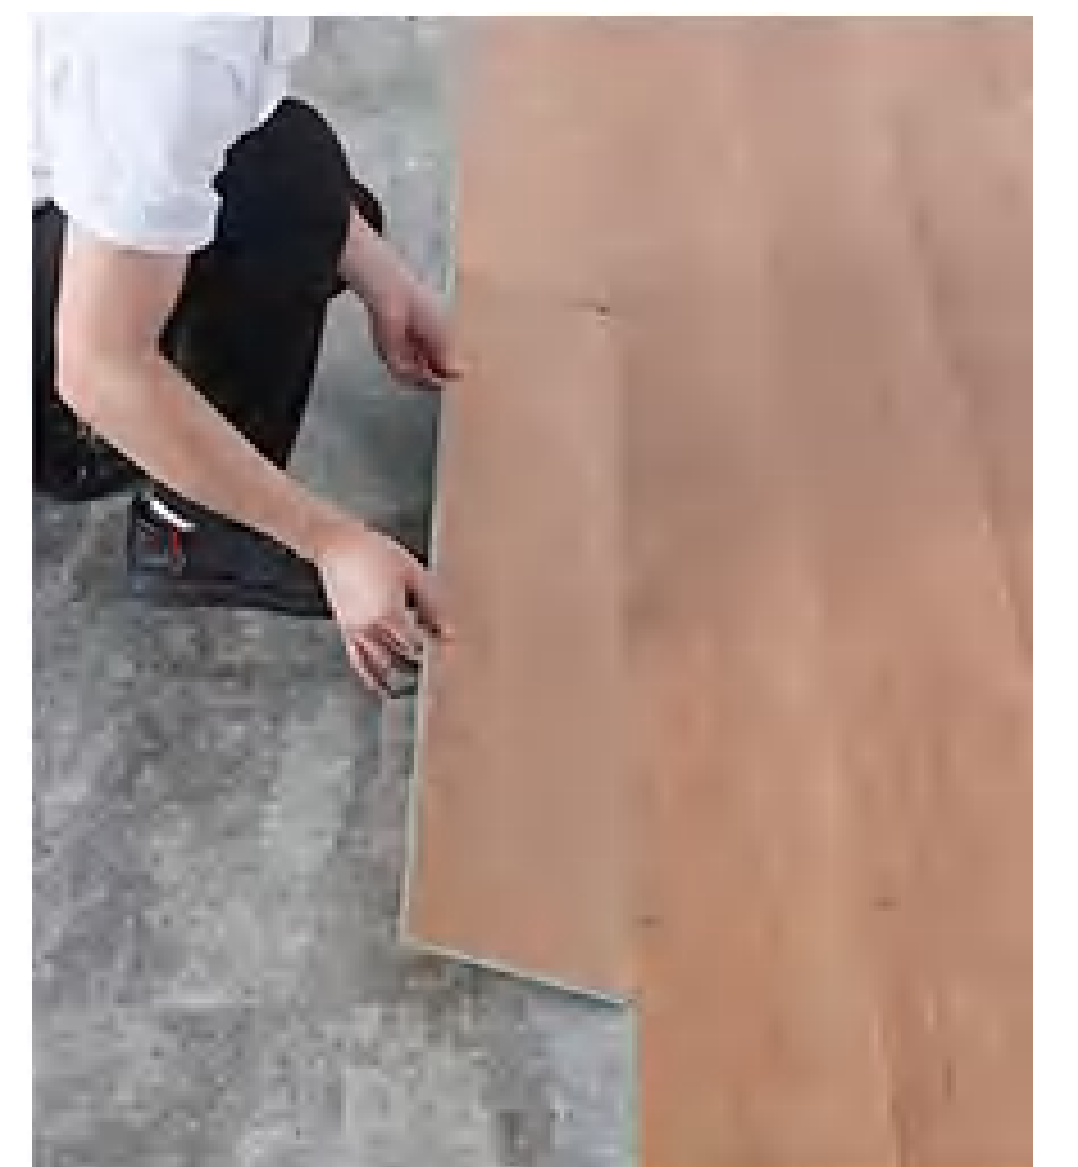

## LVT Vinyl Tiles (Glue down/ Self-adhesive/ Click)


Wooden planks

Dimension: 6 " \*36 " /7 " \*48 "

Thickness: 2.0 / 3.0 / 4.0 mm



Format : Tiles  
Size : 600mm\*600mm

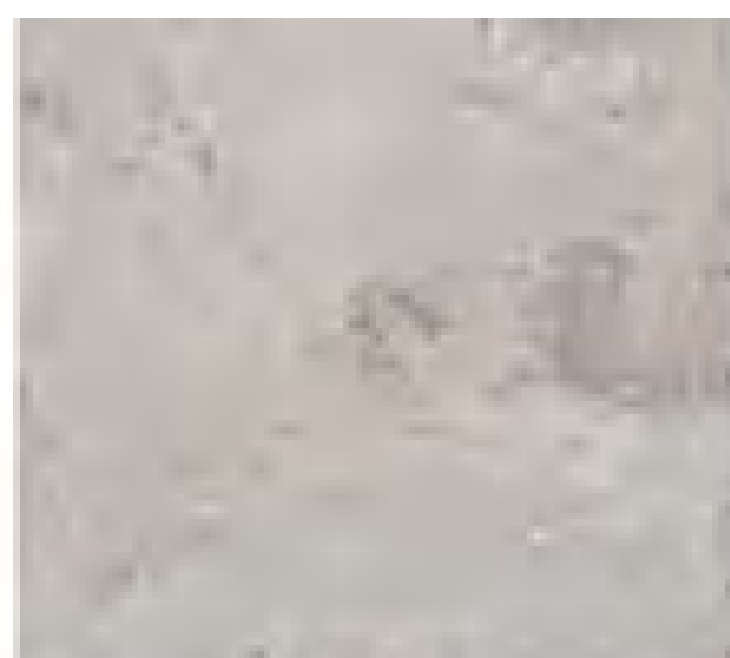

Format : Tiles  
Size : 600mm\*600mm




Format : Tiles  
Size : 600mm\*600mm




Format : Tiles  
Size : 600mm\*600mm



Format : Tiles  
Size : 182mm x 1220mm

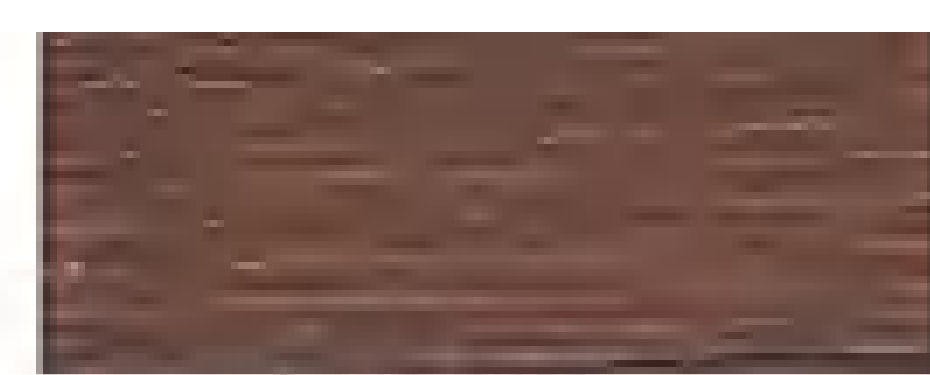

Format : Tiles  
Size : 182mm x 1220mm

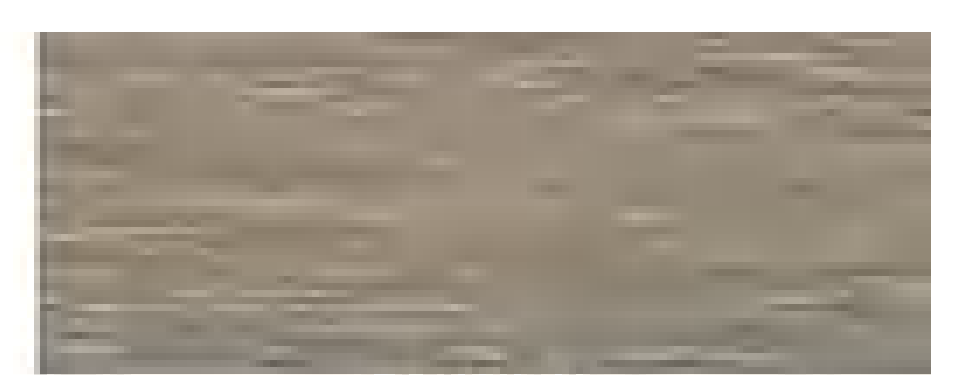

Format : Tiles  
Size : 182mm x 1220mm



Format : Tiles  
Size : 182mm x 1220mm



Format : Tiles  
Size : 182mm x 1220mm



Format : Tiles  
Size : 182mm x 1220mm





# Relle Floor


[www.relleflooring.com](http://www.relleflooring.com)

## Relle flor advantages

1. Owns 180,000 sqm lands covering four manufacture basis , largest scale in China.
2. Powerful R&D ,Relle ' s design cover all over popular designs.
3. 14 homogeneous lines, 18 sets of heterogeneous lines, 20 SPC lines, 20 printing lines .
4. Passing all professional Certificates from Europe and USA.
5. Relle projects covering whole world relies on same European standard at nice cost.
6. One-stop solution service with Relle self floor & wall covering.



## Relle worldwide projects presentation

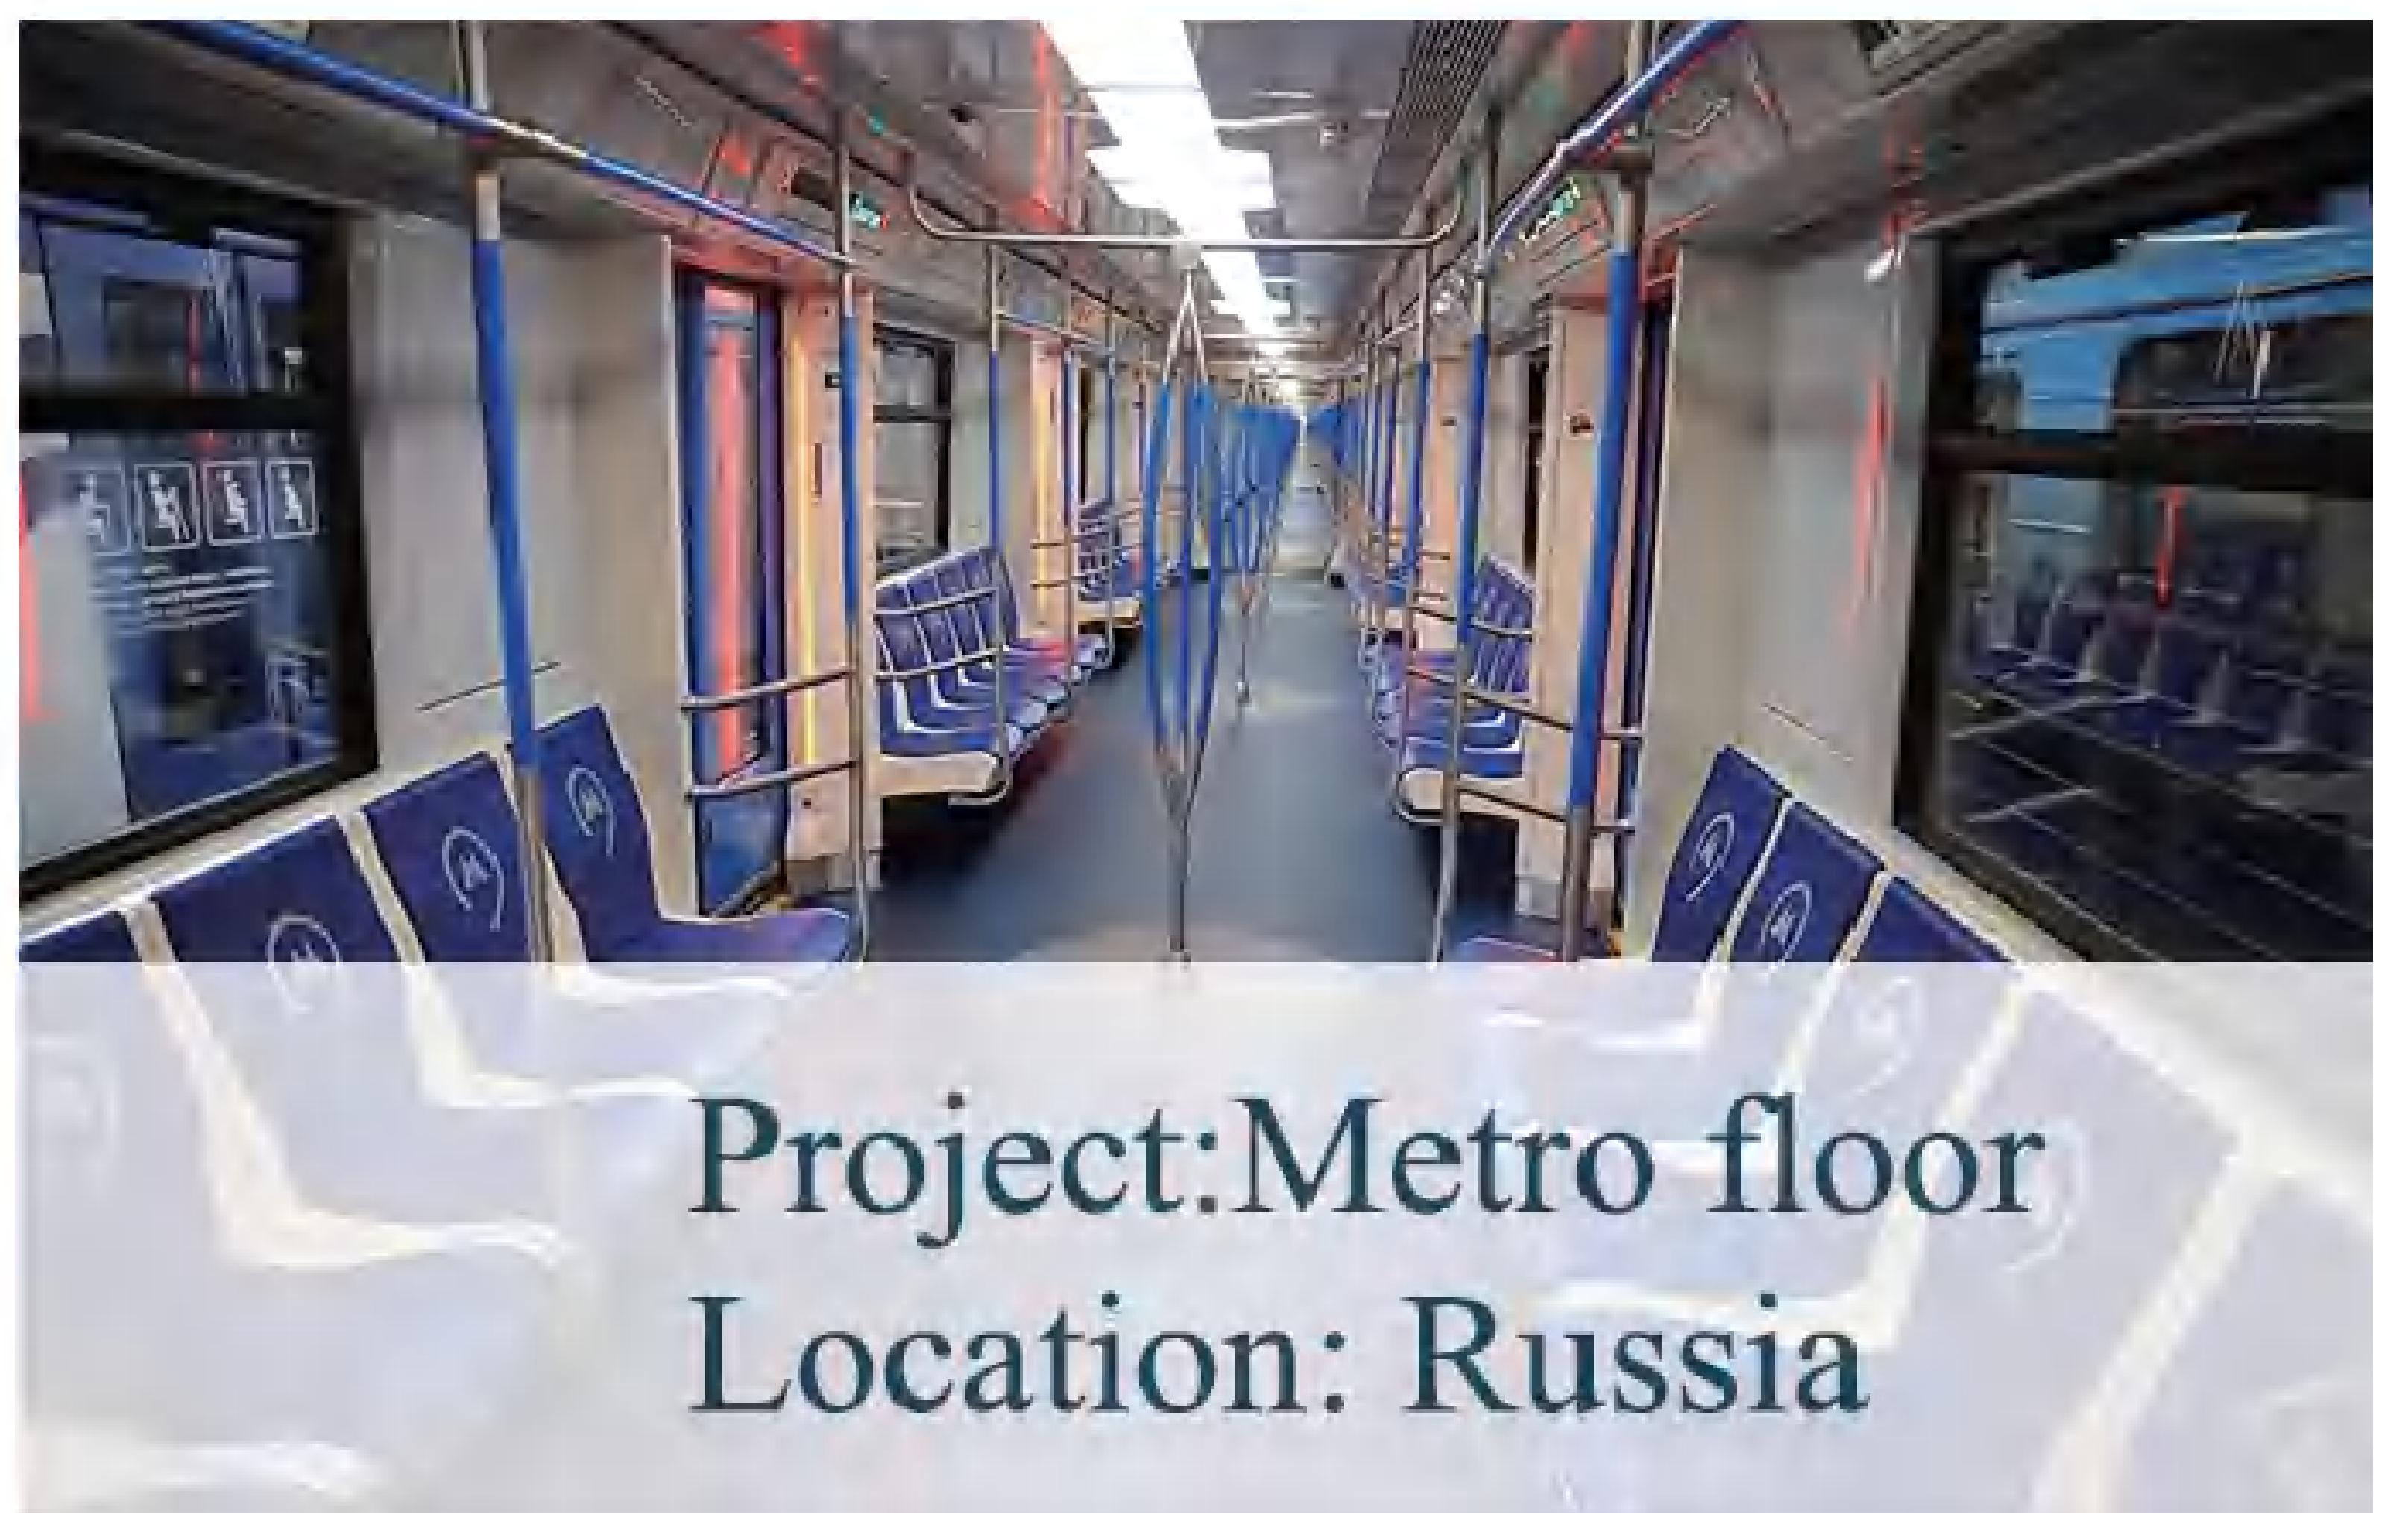






# Relle Floor

www.relleflooring.com

## Installation accessories


### Cove Fillet

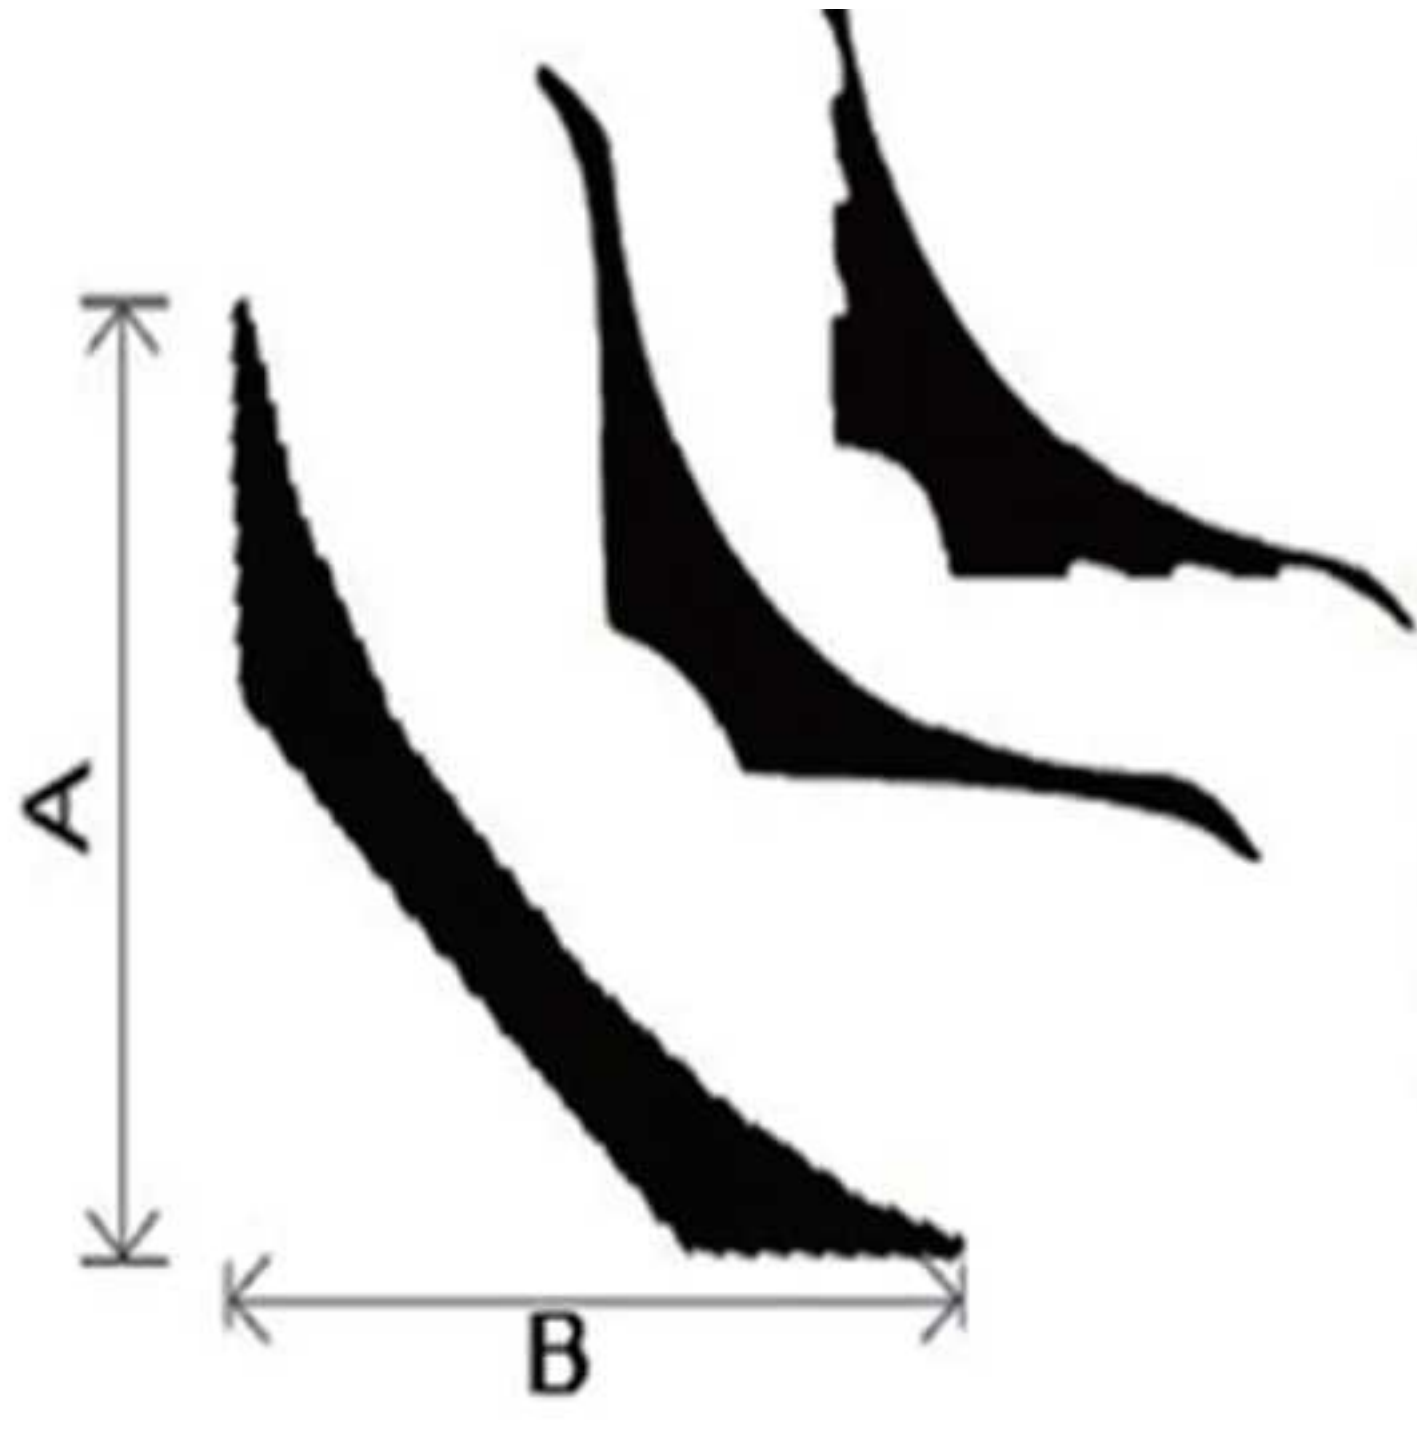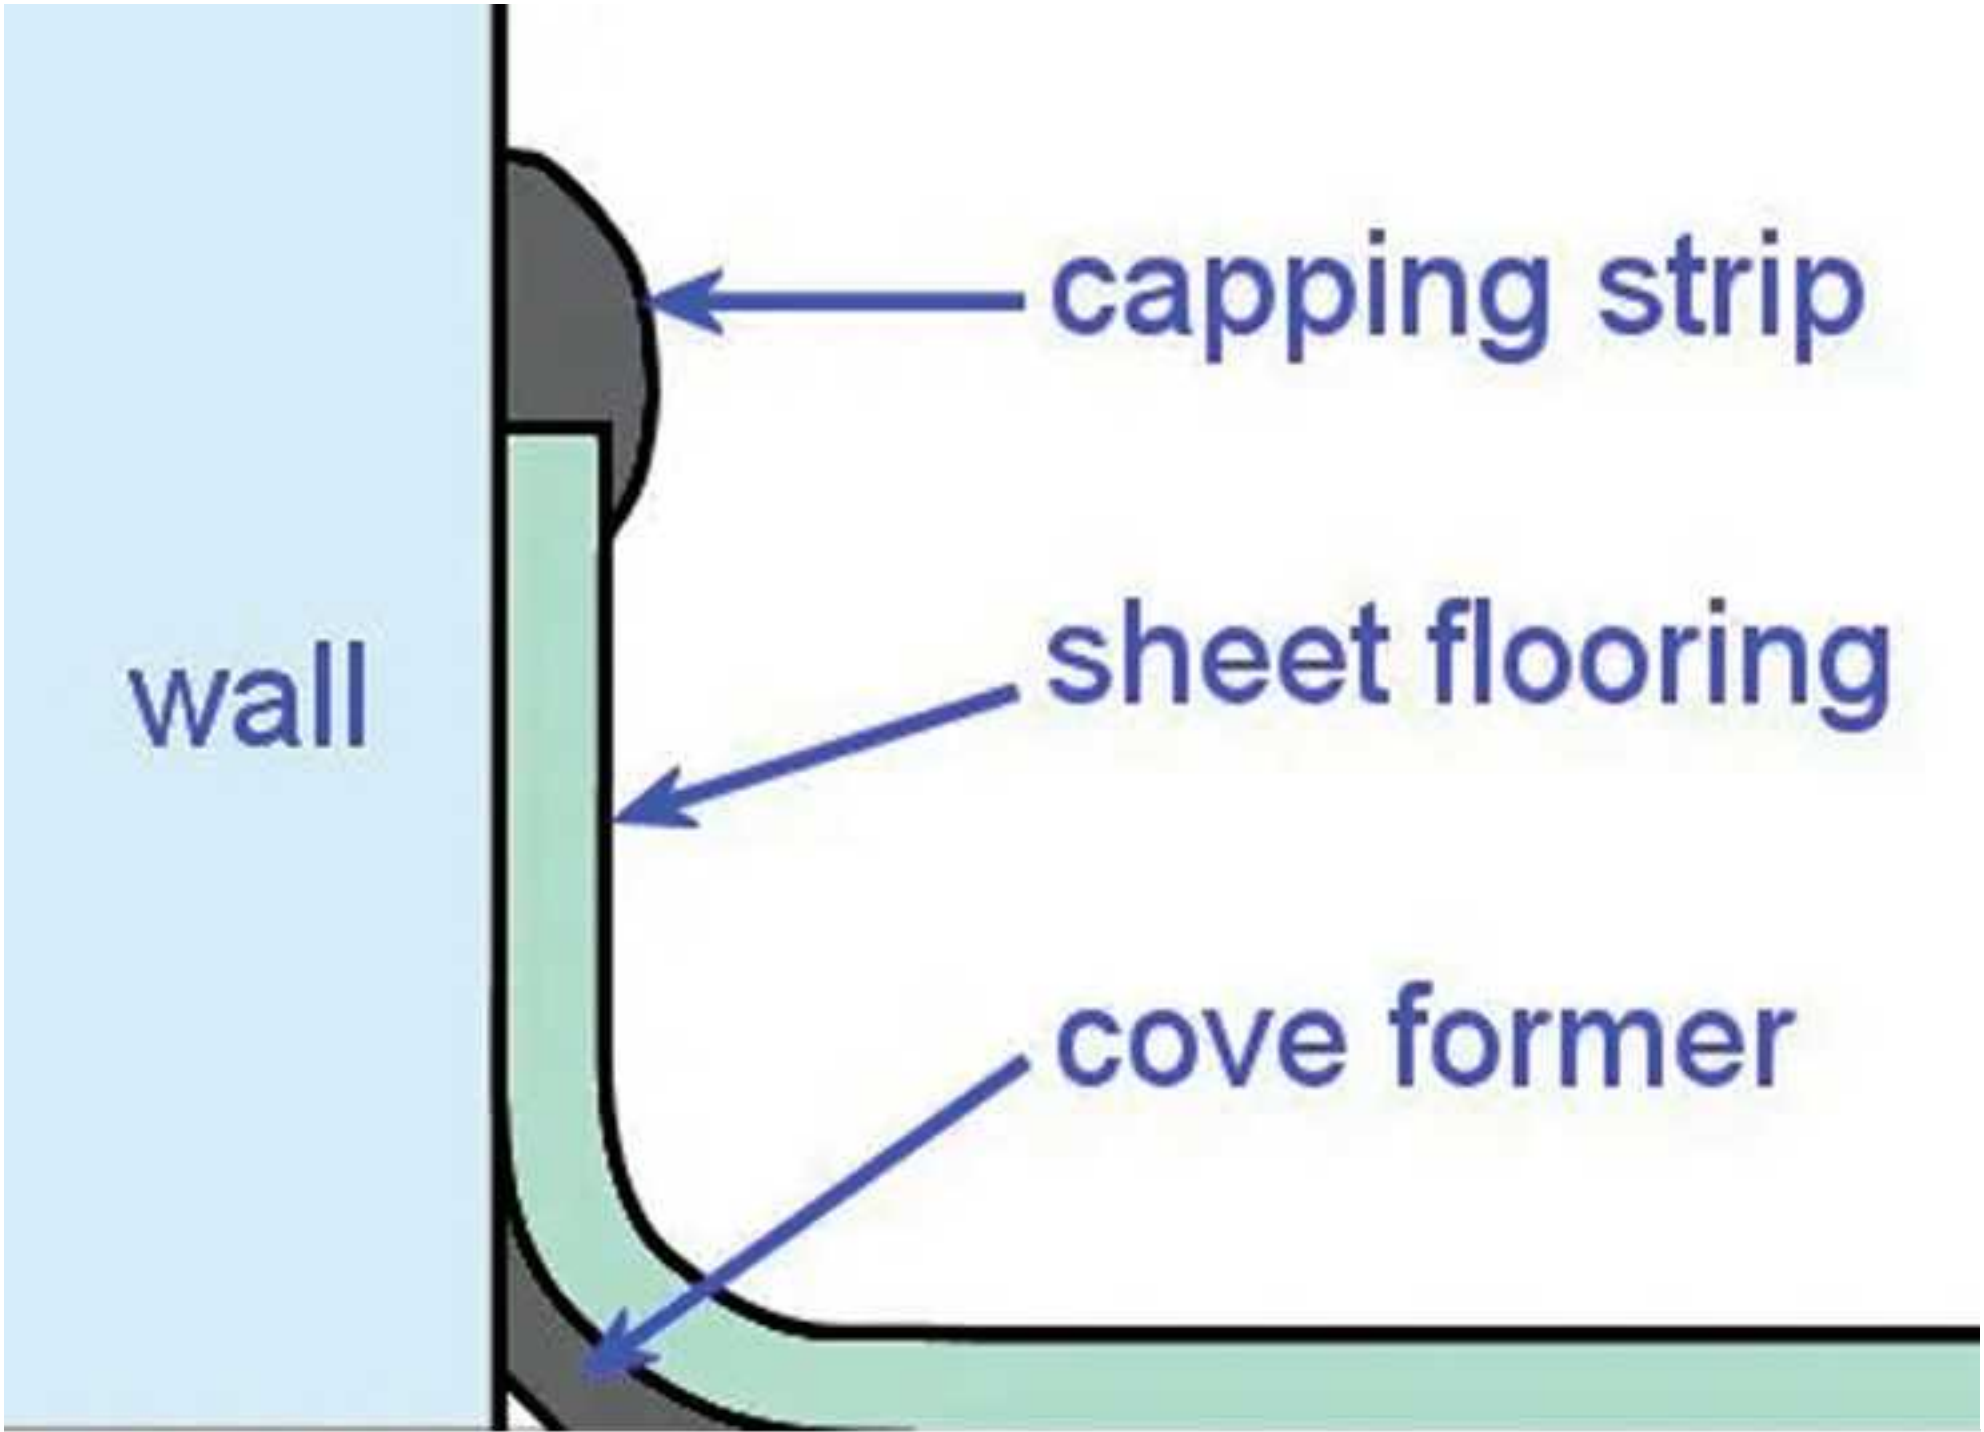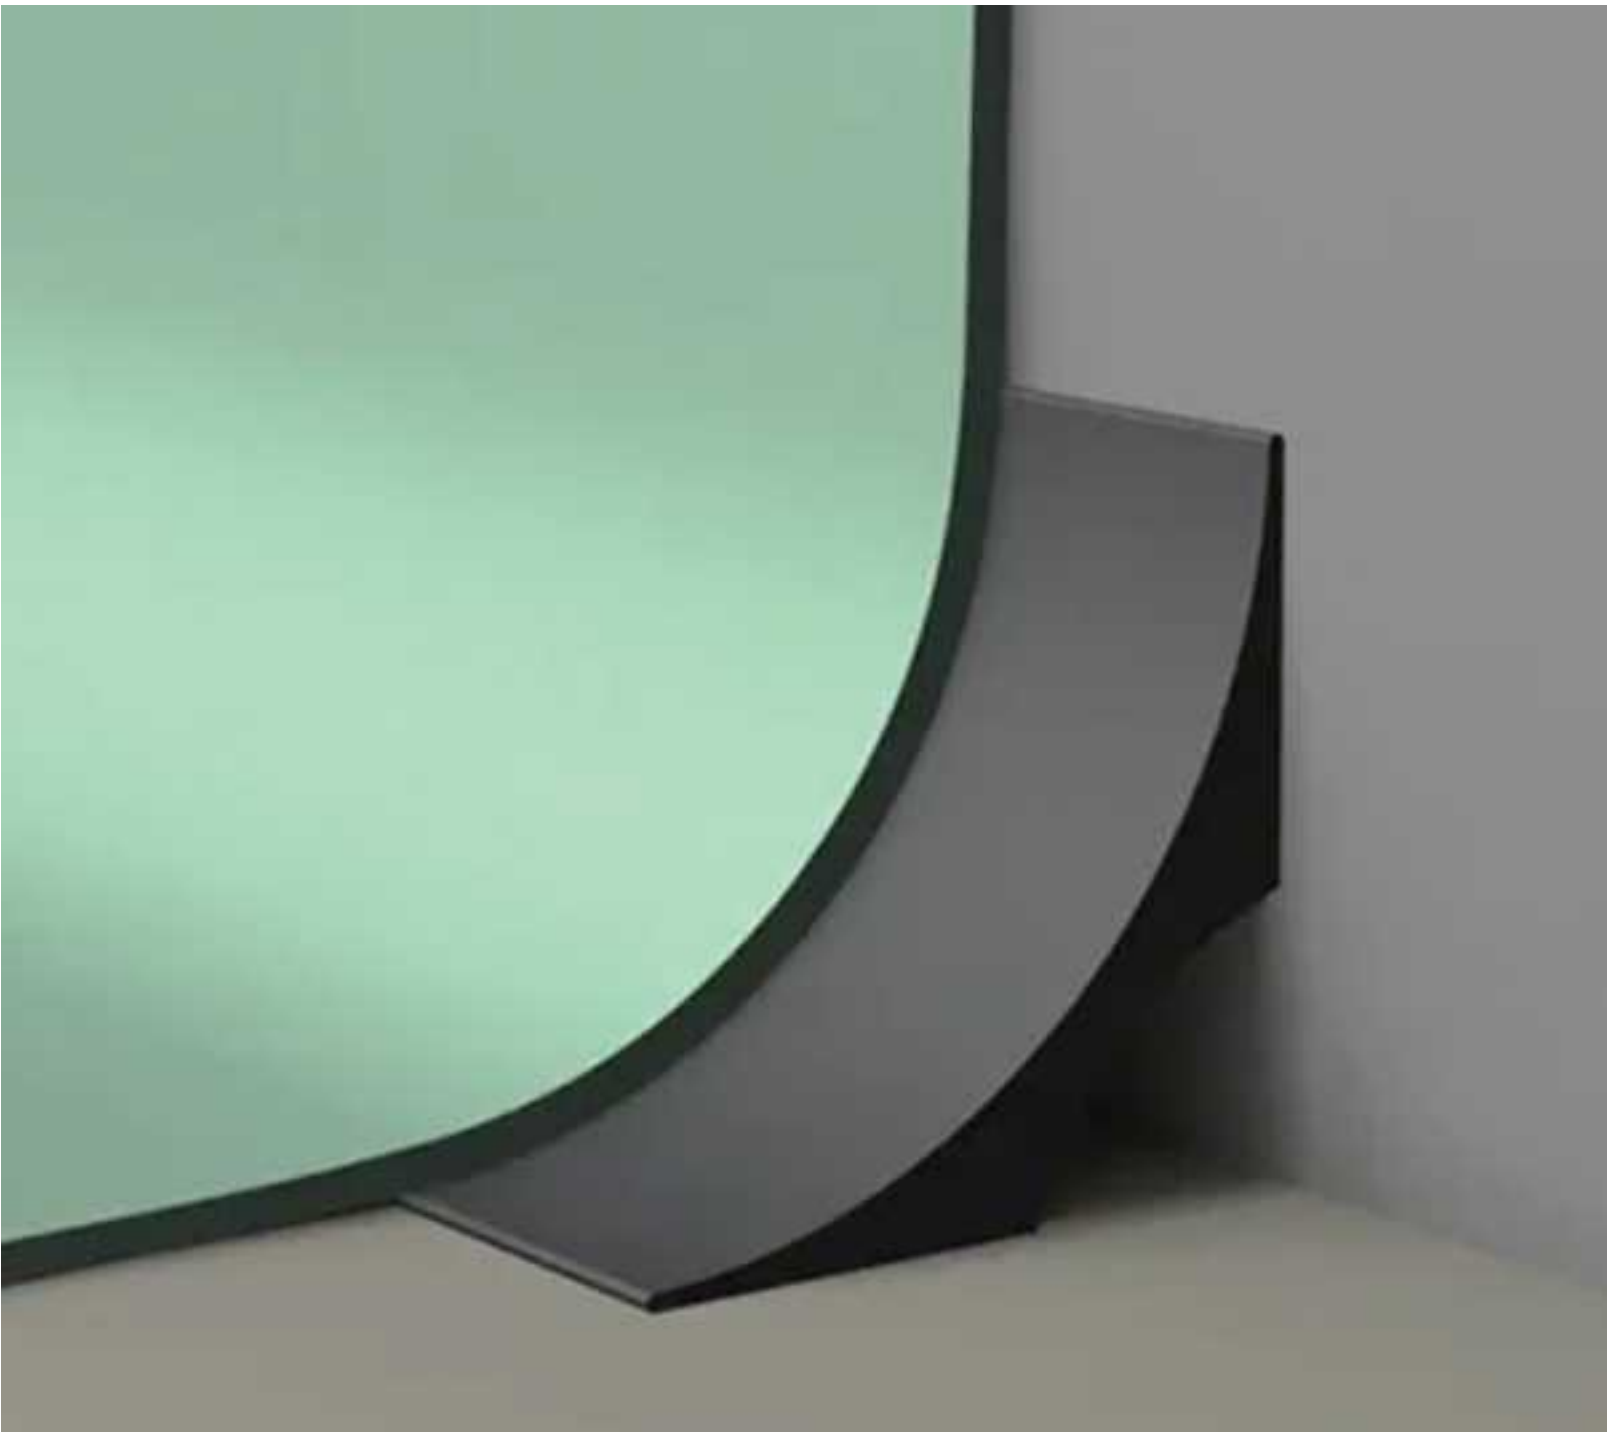

型号 Code	规格 Specification	
	A	B
E 25	20	20
E 30	25	25
E 35	30	30

单位: mm

### Skirting

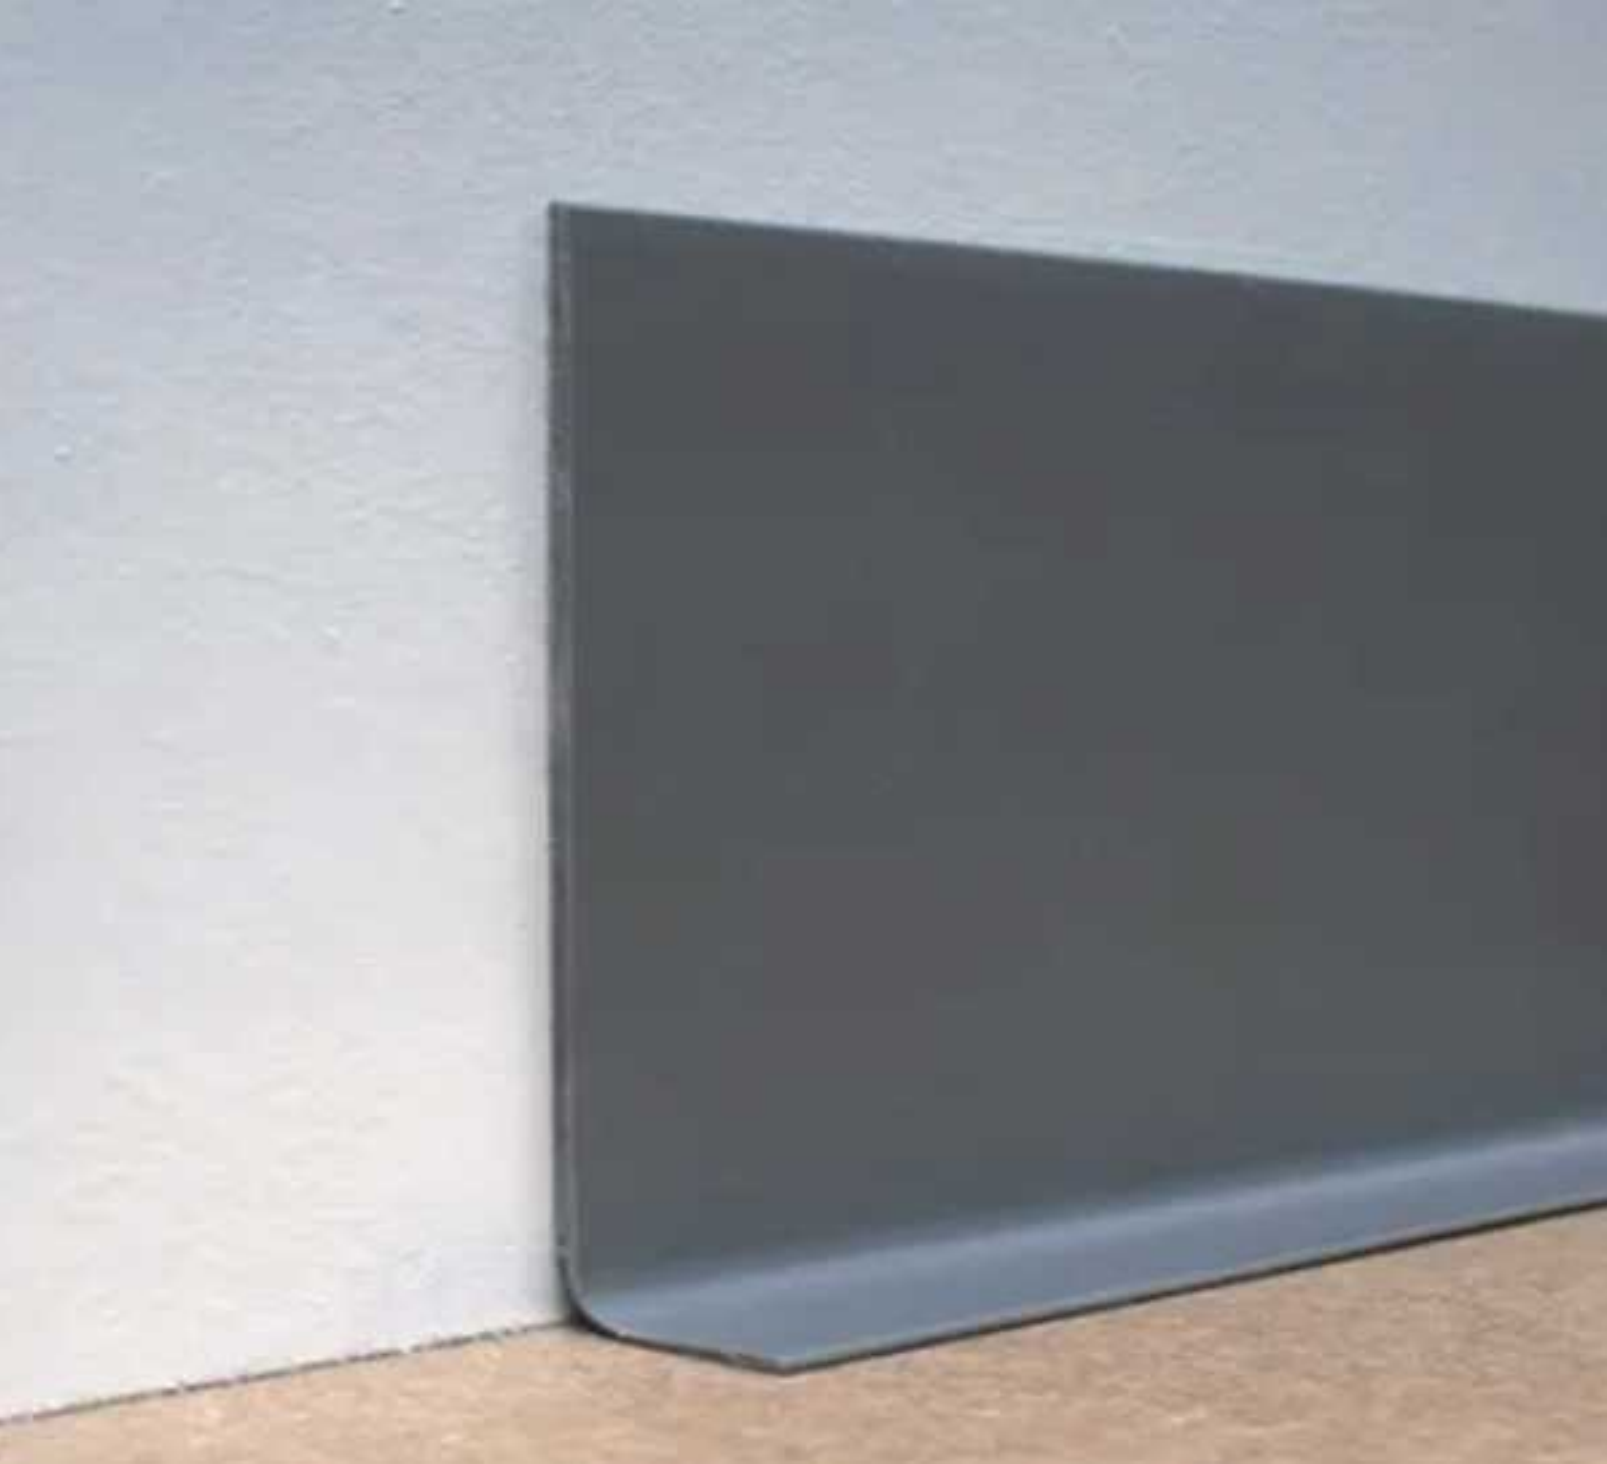

### Strip Capping




Primer



Self-Leveling



Adhesive

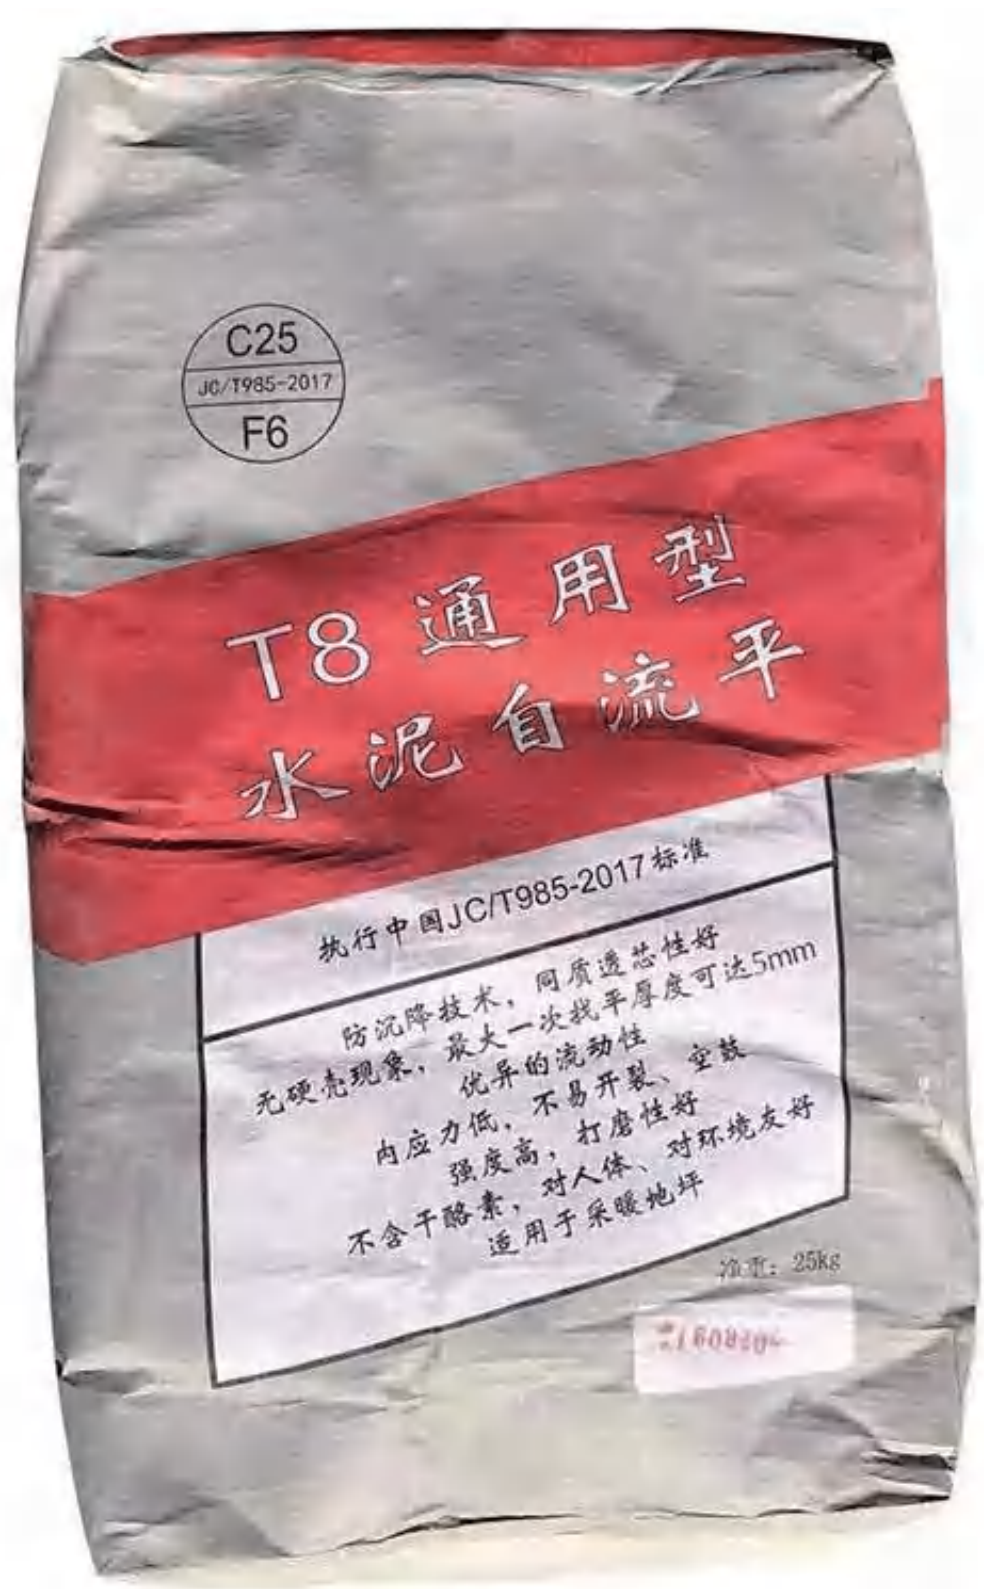

Site condition analysis and direction before purchasing for free



Installation direction from Relle technician team



Maintenance direction after sales-Waxing



# Relle Floor

www.relleflooring.com

## Relle Certificates

**SGS**

**Test Report** No. CANNL2017821001 Date: 19 Oct 2020 Page 1 of 6

RELLE DECORATION MATERIAL GUANGZHOU CO., LTD  
NO.306 D4 BAISHI INDUSTRIAL PLAZA, NO.280 JIXIAN RD, BAIYUN AREA, GUANGZHOU, CHINA

The following sample(s) were submitted and identified on behalf of the clients as: PVC Sheet

SGS Job No.: QZ/N201005620P-C - GZ  
Internal Reference No.: QZ/N201005620SC  
Date of Sample Received: 14 Oct 2020  
Testing Period: 14 Oct 2020 - 19 Oct 2020  
Test Requested: Selected (test) as requested by client.  
Test Method: Please refer to next page(s).  
Test Results: Please refer to next page(s).  
Conclusion: Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBDEs) and Phthalates such as Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) and Diisobutyl phthalate (DIBP) comply with the limits as set by RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of  
SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

*Allie Chen*  
Allie Chen  
Approved Signatory

Member of the SGS Group (ISO 9001)

**EPH**  
SUCCESS BY QUALITY  
Construction and Product Technology GmbH  
Südliche Weg 21 • 01117 Dresden • Germany  
www.e-ph.de

**CE TEST CERTIFICATE**  
FOR PERFORMANCE CHARACTERISTICS OF CONSTRUCTION PRODUCTS FOR THE CE MARKING

FLO-21-02-03-03

Products: Vinyl floorings  
Thickness: 1.6-3.0mm

Order: Testing and classification of selected properties according to EN 14041:2004+AC:2005+AC:2006 (CE-labelling)

Test report: 2720469

Test results: The above mentioned Vinyl Floorings can be classified regarding to the tested properties according to EN 14041:2004+AC:2005+AC:2006 (CE-labelling) as follows:

Properties	Results	Declaration according to EN 14041:2004+AC:2005+AC:2006
Reaction to fire performance according to EN ISO 9239-1 and EN ISO 11925-2, Classification according to EN 13501-1:2019	0.7 kW / m <sup>2</sup> 947 W x min	Reaction to fire class B-s2
- Critical heat flux - Smoke production	$\mu = 0.36$	class DS
Sliding behavior according to EN 13893:2003	$\mu = 0.36$	class DS
Formaldehyde emission according to EN 1717-1:2005	< 1.00 (g/h)	class E1

LOD = Limit of Detection

Dresden, 03/02/2021

**intertek**  
Test Quality Assured

## TEST REPORT

SCOPE OF WORK  
PVC Flooring


REPORT NUMBER  
2002260909H-001

TEST DATE(S)  
2020-02-26 - 2020-03-23

ISSUE DATE  
2020-03-23

PAGES  
5

DOCUMENT CONTROL NUMBER  
LFT-APAC-SH-OP-104(May 1, 2019)  
© 2020 INTERTEK

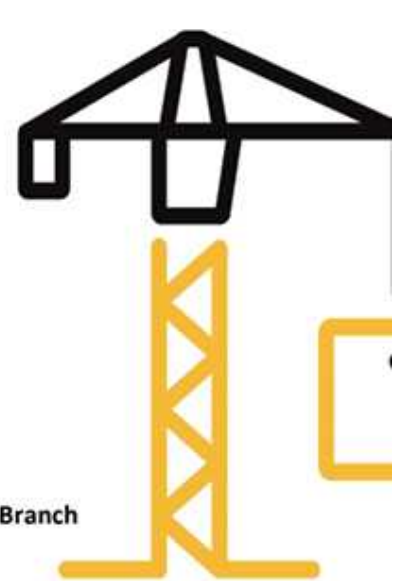

Intertek Testing Services Shenzhen Ltd. Shanghai Fenglian Branch

**Certificate of Registration**

**The Governing Board of Q.A. International Certification Limited**

Unified Social Credit Code: 91310116756956424L  
Registration No.: QAIM / CM / 2006032

(hereinafter called the Registered Company) the right to be listed in the Directory of Registered Companies in respect of the services listed below. These services shall be offered by the Registered Company at or from only the active business address given below in accordance with the quality management system in compliance with ISO 9001:2015.

Approved Scope to which this Certificate refers:

**The Manufacture and Sales of PVC Floorings.**

(Please note that the above scope represents the certified activity of this named organization and as such, the organization may undertake additional activities that are not covered under this certification).

Signed for and on behalf of the Board

*CHIEF EXECUTIVE*  
*SCHEME MANAGER*

Certificate Issue Date: 2nd December 2020 - Certificate Renewal Before: 2nd December 2021  
Date of Initial Registration: 2nd December 2020 - Re-Certification Before: 2nd December 2023

This Certificate of Registration is granted subject to the Regulations approved by the Board.  
The information of this certificate can be searched on the website of CNCA (www.cnca.gov.cn).  
The certified organization should apply for regular audits to maintain its qualification.

**QA INTERNATIONAL**  
Q.A. International Certification Ltd.  
Quality Court  
Burlington  
Ontario, Canada  
M7L 1G8  
Tel: +1 (416) 321-2672  
Fax: +1 (416) 321-2699  
www.qai.ca

**IAF**  
INTERNATIONAL  
ACCREDITED

**UKAS**  
INTERNATIONAL  
ACCREDITED

**CELAB**  
Via Maria snc  
44100 Latta  
Italy  
celab@celab.com

**International Quality Award Certificate**

Certificate Number UCN : 80226090903  
Job : J25271

Brand Name : Relle  
Type : Rubber Flooring  
Model N : 500\*500mm, 600\*400mm, 500\*500mm, 600\*600mm, 800\*600mm, 1000\*1000mm, 1.22m\*1.5m, 1.5m\*1.5m, 1.8m\*1.0m, 2m\*1.0m, 2.1m\*1.0m

Manufacturer : Relle decoration material Guangzhou Co., Ltd  
Address : No.311 Baishi industrial plaza, Jixian road, Baiyun district, Guangzhou, China

The CELAB council is delighted to award the above organization this certificate in recognition of its product detailed above. The certificate holder is entitled the right to use on the product or on the carton box the following logo:

Note: The logo is only valid when the UCN number of the certificate is indicated.

If you want to check the authenticity of this certificate go in the web site [www.celab.com](http://www.celab.com) and introduce the UCN number in the "Check document authenticity" area. You will see copy of this certificate.

Approved by: *Michael Bock*

General Manager  
CELAB  
[www.celab.com](http://www.celab.com)

Certificate Number UCN: 80226090903  
Date of Issue: 2018-11-12  
Validity: 3 years from date of issue

DOC 124 Rev 1.0

SCS Global Services does hereby certify that an independent assessment has been conducted on behalf of

**Relle Decoration Material Guangzhou Co., Ltd.**

311 Baishi industrial plaza, Jixian road, Baiyun district, Guangzhou, China

For the following product(s):

**Sheet Vinyl:**

Anti-Static PVC Flooring Tiles (Maximum thickness: 4.0mm)

Homogeneous Vinyl Flooring (Maximum thickness: 4.0mm)

The product(s) meet(s) all of the necessary qualifications to be certified for the following claim(s):

**FloorScore®**

Indoor Air Quality Certified to SCS-EC10.3-2014 v4.0

Conforms to the CDPH/EHLB Standard Method v1.2.2017 (California Section 01350), effective April 1, 2017, for the school classroom and private office parameters when modeled as Flooring.

Measured Concentration of Total Volatile Organic Compounds (TVOC): Less than/equal to 0.5 mg/m<sup>3</sup> (in compliance with CDPH/EHLB Standard Method v1.2.2017)

Registration # SCS-FS-05070

Valid from: September 1, 2022 to August 31, 2024

SCS Global Services is currently the only certification body approved by the Resilient Floor Covering Institute (RFCI) to provide FloorScore® product certification; certified products are only listed on the SCS Green Products Guide. <http://www.scsglobal.com/certified-green-products-guide>

**SCSglobal**  
SERVICES

*Stanley Ma*  
Stanley Ma  
2000 Powell Street, Ste. 1

## Relle worldwide exhibitions

