



Relle

Rubber Flooring



Professional Manufactuer of Decorational Materials
www.relleflooring.com

WhatsApp: +86 18603080392

Email: ritazhou @ relleflooring.com

Fax: +86 20 31213586 Tel: +86 20 31213586

GZ: No.501 Henggang road, Dongping street, Baiyun area,Guangzhou.



Product type, color display



SAFE DURABLE

Solid Round (PDY/PDF)


Solid Hammered (PDC)

Chip Hammered (PKC/PKY)

Chip Stone (PSP)

Tian Yun (TYUN)

Stair (LDY/LKY)



Solid Round (PDY/PDF)



PDY2001



PDY3001



PDY3002



PDY3003



PDY3004



PDY9001



PDY9002



PDY9003



PDY9004



PDY9005



PDY8001



PDY8002



Solid Round
3T/4T



PDF8003



PDF8004



PDF8005



PDF4001



PDF7001



PDF7002



PDF7003



PDF4002



PDF5001



PDF5002



PDF6001




PDF6002







Solid Hammered (PDC)





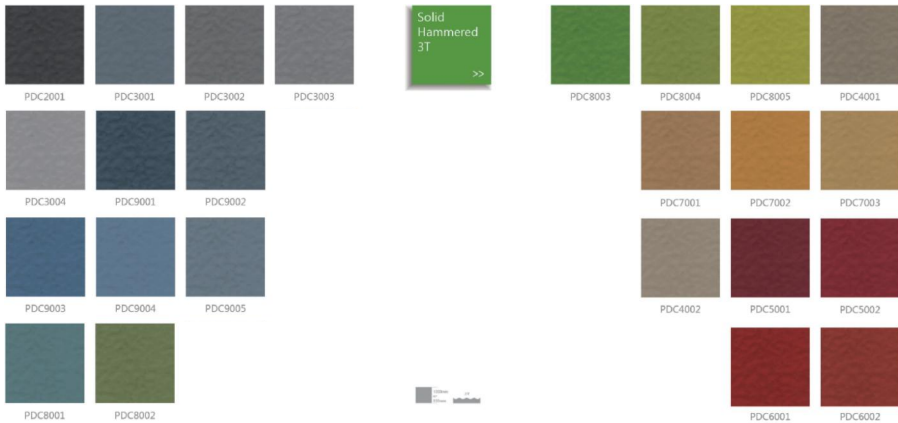


Chip Hammered (PKC/PKY)

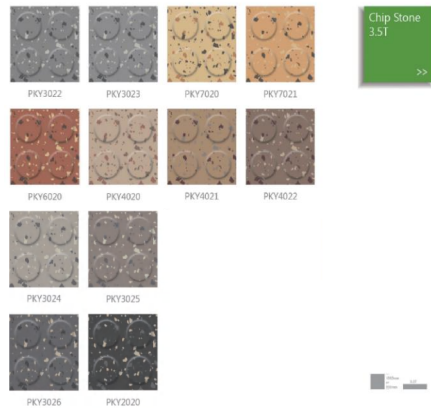
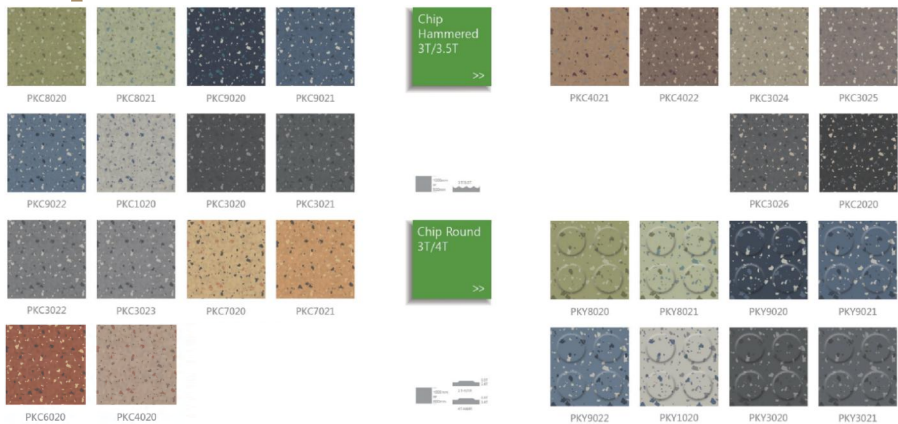






Chip Stone (PSP)



Tian Yun (TYUN)



Stair (LDY/LKY)

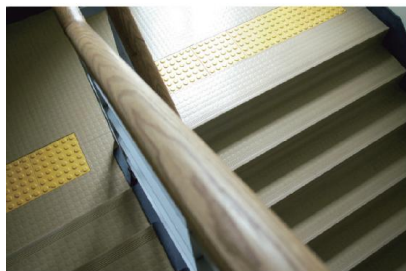

SAFE DURBLE Tile type rubber flooring with multi function



SAFE COZY

Roll Solid (JDA)

Roll Chip (JKA)

Hong Yun (HY)

Yi Yun (YY)

Feng Yun (FY)



FY0001



FY0002



FY0015



FY0016



FYUN
ZT

>>



FY0011



FY0012



FY0013



FY0014



FY0003



FY0004



FY0005



FY0006



FY0017



FY0018



FY0019



FY0020



FY0007



FY0008



FY0009



FY0021



FY0022



FY0023



FY0010



FY0024



KA0001



KA0002



KA0003



KA0004



KA0005



KA0006



KA0007



KA0008



KA0009



KA0010



KA0011



KA0012



KA0013




KA0014



KA0015



KA0016



KA0017



KA0018



KA0019



KA0020



KA0021



KA0022



KA0023



KA0024



KA0025



KA0026



KA0027



KA0028



KA0029




KA0030



KA0031



KA0032



KA0033




KA0034



KA0035



KA0036



KA0037



KA0038



KA0039



KA0040

KA0041

KA0042

KA0043

KA0044

KA0045

KA0046

KA0047

KA0048

KA0049

KA0050

KA0051

KA0052

KA0053

KA0054

KA0055

KA0056

KA0057

KA0058

KA0059

KA0060

KA0061

KA0062

KA0063

KA0064

KA0065

KA0066

KA0067

KA0068

KA0069

KA0070

KA0071

KA0072

KA0073

KA0074

KA0075

KA0076

KA0077

KA0078

KA0079

KA0080

KA0081

KA0082

KA0083

KA0084

KA0085

KA0086

KA0087

KA0088

KA0089

KA0090

KA0091

KA0092

KA0093

KA0094

KA0095

KA0096

KA0097

KA0098

KA0099

KA0100

KA0101

KA0102

KA0103

KA0104

KA0105

KA0106

KA0107

KA0108

KA0109

KA0110

KA0111

KA0112

KA0113

KA0114




RUBBER FLOORING SYSTEM

Chip Hammered-10 (ATH)

Chip Simple-10T (ATS43)




Chip Hammered-10 (ATH)&Chip Simple-10T (ATS43)

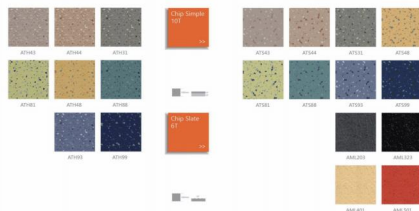


RUBBER FLOORING SYSTEM

SAFE OCEAN

Xiang YUN(XYUN)




Xiang YUN(XYUN)

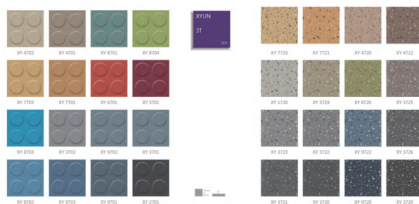


RUBBER FLOORING SYSTEM

SAFE GUARD

Ji YUN(JYUN)



Ji YUN(JYUN)

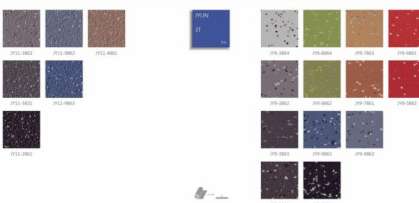

PRODUCTS FEATURE

Natural environmental protection materials

Excellent dimensional stability

Excellent wear resistance

Strong resilience

Excellent skid resistance

Excellent chemical resistance


Strong fire resistance

Excellent sound absorption

Beautiful laying effect (no welding)

Good flexibility

Low TVOC emission

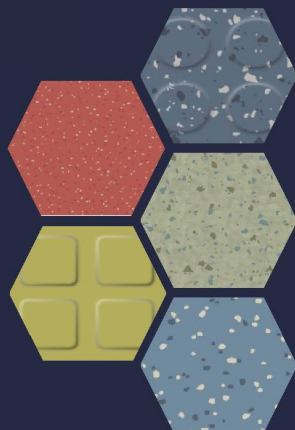



Relle Floor


www.relleflooring.com

Guangzhou Honghui hospital project



RUBBER FLOORING SYSTEM

Wuxi airport project

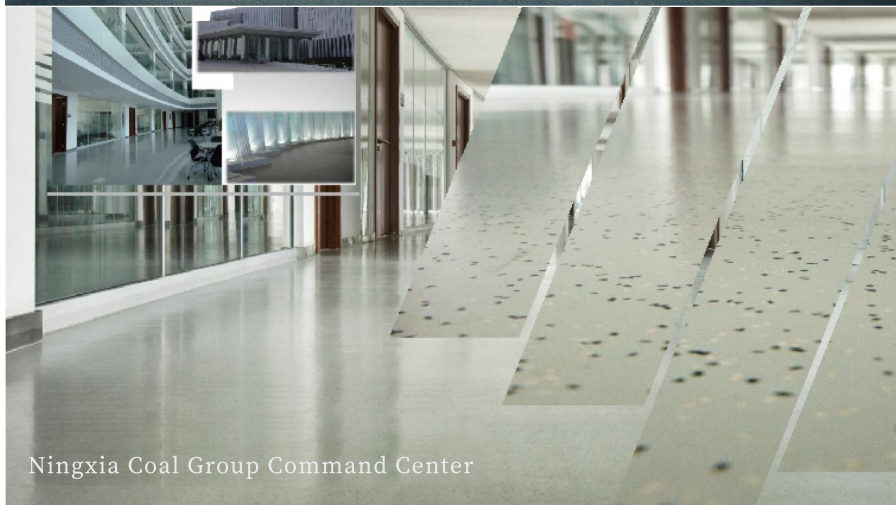

Ningxia Coal Group Command Center



Technical data

	Test method	Requirements	Average test results from running production
CE conformity	EN 14041		Manufacturer: relle systems GmbH, D-69469 Weinheim
DoP-No.	EN 14041		0021
Thermal conductivity	EN 10456	$\lambda = 0.17 \text{ W/(m·K)}$	Fulfilled
Dynamic coefficient of friction	EN 13893	DS	Fulfilled
Reaction to fire	EN 13501-1	Not bonded	C=s1
Reaction to fire	EN 13501-1	Bonded on mineral subfloor	B=s1

Properties acc. to EN 1817

Thickness	EN ISO 24346	Mean value $\pm 0.15 \text{ mm}$ acc. to EN 1817	3.5 mm
Dimensional stability	EN ISO 23999	$\pm 0.4 \%$	$\pm 0.2 \%$
Cigarette-burn resistance	EN 1399	Procedure A (stubbed out) \geq level 4 Procedure B (burning) \geq level 3	Fulfilled
Flexibility	EN ISO 24344, procedure A	Mandrel diameter 20 mm, no fissuring	Fulfilled
Hardness	ISO 48-4	$\geq 75 \text{ Shore A}$ acc. to EN 1817	82 Shore A
Residual indentation	EN ISO 24 343	Mean value $\leq 0.25 \text{ mm}$ at thickness $\geq 3.0 \text{ mm}$	0.12 mm
Abrasion resistance at 5 N load	ISO 4649, procedure A	$\leq 250 \text{ mm}^3$	115 mm ³
Colour fastness to artificial light	ISO 105-B02, procedure 3, test conditions 6.1 a)	At least level 6 on the blue scale; \geq level 3 on the grey scale	Grey scale \geq level 3 acc. to ISO 105-A02
Classification	EN ISO 10874	Commercial / Industrial	34 / 43

Additional technical properties

Toxicity of fire gases	DIN 53436		Carbonisation gases are non-toxic
Anti-slip properties	DIN EN 16165	Acc. to DGUV 108-003	R 9
Improvement in footfall sound absorption	ISO 10140-3		10 dB
Effect of chemicals	EN ISO 26987		Resistant depending on concentration and time of exposure*
Electrical insulation properties	EN 1081 R1		$> 10^9 \text{ Ohm}$
Electrical propensity when walked upon	EN 1815		Antistatic, charging in case of rubber soles $< 2 \text{ kV}$
Effect of a castor chair	EN Iso 4918		Suitable if castor wheels, type W, acc. to EN 12529, are used
Underfloor heating	EN 1264-2		Suitable, max. 35 C°

* In case of increased impact of oils, grease, acids, alkalis and other aggressive chemicals please contact us.

Colour variations due to different production batches as well as technical alterations to improve the product have to be accepted.

EN 1817: Specification for homogeneous and heterogeneous smooth elastomer floor coverings